



## DC FANS

**80x80x20mm**





- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 76g



| JARO             | *Bearing System | Rated Voltage | Rated Current | Rated Speed | Maximum Air Flow    |      | Maximum Static Pressure |                     | Sound Level |
|------------------|-----------------|---------------|---------------|-------------|---------------------|------|-------------------------|---------------------|-------------|
| Part Number      | B / F           | V             | A             | RPM         | m <sup>3</sup> /min | CFM  | mm-H <sub>2</sub> O     | In-H <sub>2</sub> O | dBA         |
| JCD0802012JB1A0E | B               | 12            | 0.13          | 2400        | 0.78                | 27.4 | 2.29                    | 0.09                | 25          |
| JCD0802012LB1A0E | B               | 12            | 0.16          | 2700        | 0.88                | 31.2 | 2.79                    | 0.11                | 29          |
| JCD0802012MB1A0E | B               | 12            | 0.18          | 3100        | 1.04                | 36.9 | 3.81                    | 0.15                | 34          |
| JCD0802012HB1A0E | B               | 12            | 0.24          | 3400        | 1.15                | 40.5 | 4.57                    | 0.18                | 36          |
| JCD0802012UB1A0E | B               | 12            | 0.30          | 4300        | 1.45                | 51.2 | 7.11                    | 0.28                | 43          |
| JCD0802024JB1A0E | B               | 24            | 0.07          | 2400        | 0.78                | 27.4 | 2.29                    | 0.09                | 25          |
| JCD0802024MB1A0E | B               | 24            | 0.12          | 3100        | 1.04                | 36.9 | 3.81                    | 0.15                | 34          |
| JCD0802024UB1A0E | B               | 24            | 0.20          | 4300        | 1.45                | 51.2 | 7.11                    | 0.28                | 43          |

\*Bearing system B: two ball bearing

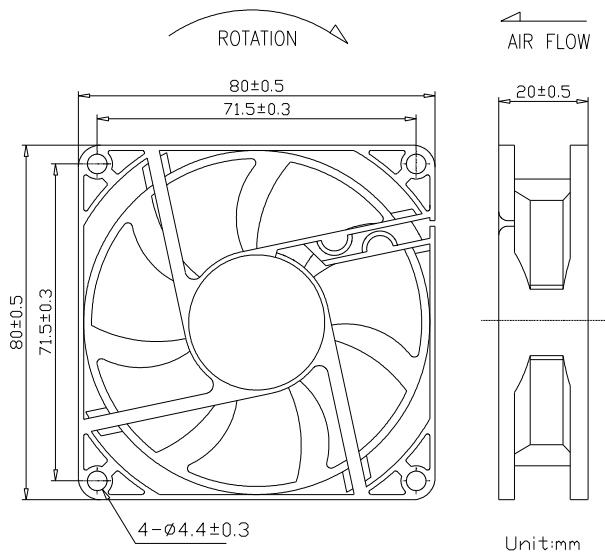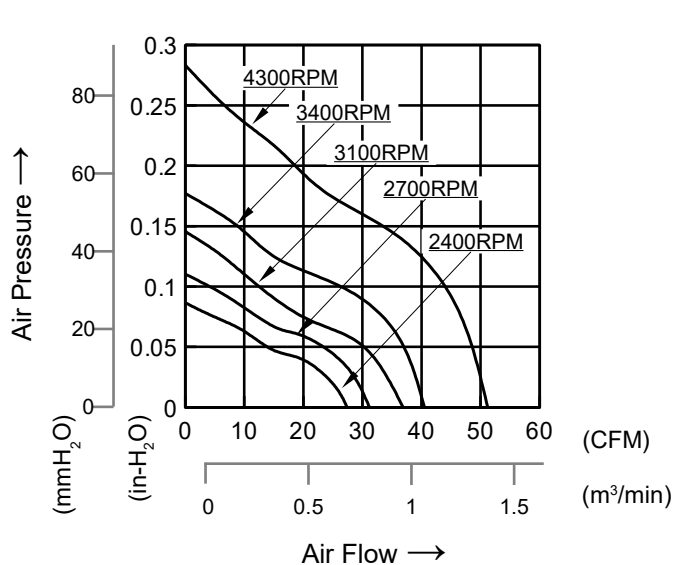

\*All models can be customized. Please contact your JARO representative for further information.

\*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.