



# BLOWERS

**97x94x33mm**





- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 150g



JARO Part Number	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
	B	V	A	RPM	m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	In-H <sub>2</sub> O	dBA
JCB0973312LB1A0E	B	12	0.21	2200	0.46	16.3	6.10	0.24	43
JCB0973312MB1A0E	B	12	0.32	2700	0.57	20.1	10.16	0.40	45
JCB0973312HB1A0E	B	12	0.60	3600	0.82	28.8	28.96	1.14	52
JCB0973324LB1A0E	B	24	0.14	2200	0.46	16.3	6.10	0.24	43
JCB0973324MB1A0E	B	24	0.18	2700	0.57	20.1	10.16	0.40	45
JCB0973324HB1A0E	B	24	0.32	3600	0.82	28.8	28.96	1.14	52

\*Bearing system B:two ball bearing

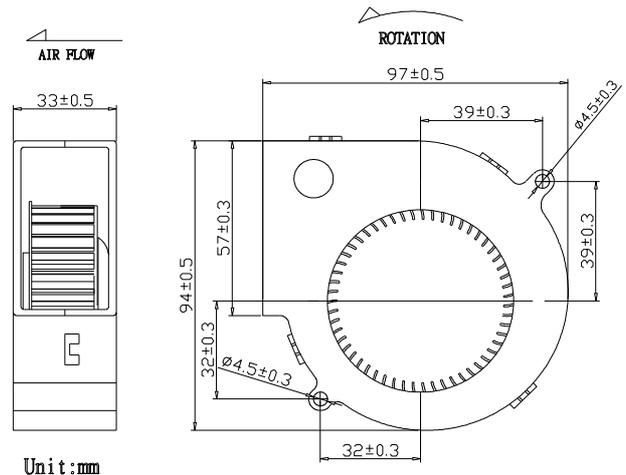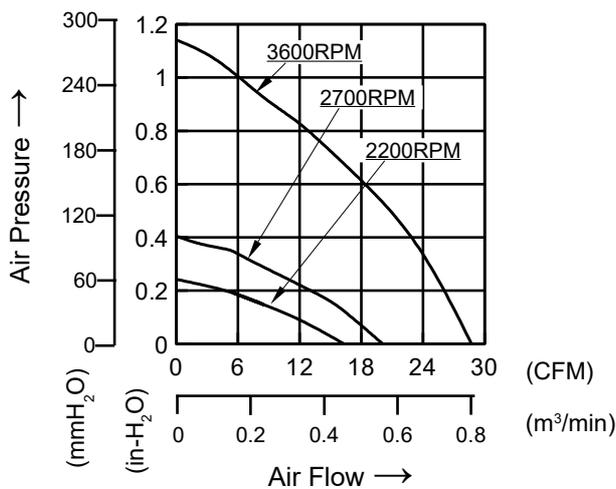

\*All models can be customized. Please contact your JARO representative for further information.

\*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.



## BLOWERS

**97x94x33mm**





- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 180g



JARO Part Number	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
	B	V	A	RPM	m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	In-H <sub>2</sub> O	dBA
JCB0973312LB1A0F	B	12	0.38	2700	0.69	24.2	18.9	0.75	48
JCB0973312MB1A0F	B	12	0.66	3200	0.82	28.7	29.2	1.15	52
JCB0973312HB1A0F	B	12	0.88	3600	0.91	32.1	34.5	1.36	55
JCB0973312UB1A0F	B	12	1.55	4200	1.09	38.6	50.6	1.99	59
JCB0973312VB1A0F	B	12	1.90	5000	1.29	45.6	73.6	2.90	63

\*Bearing system B:two ball bearing

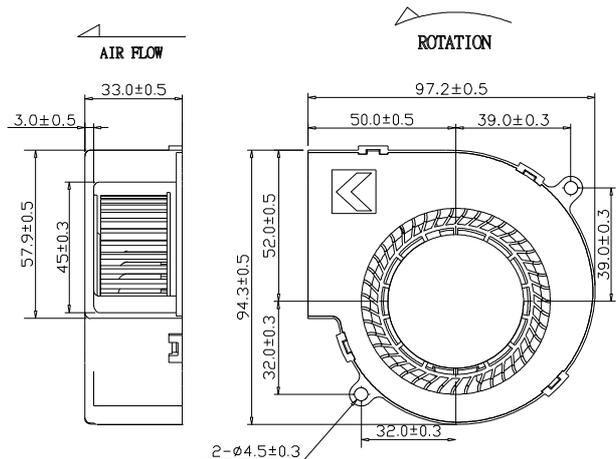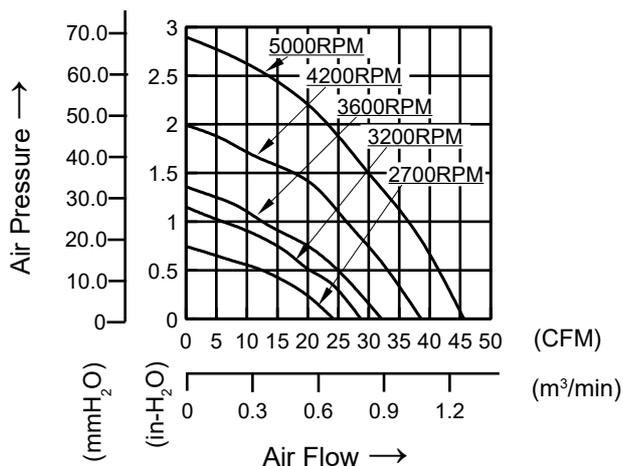

\*All models can be customized. Please contact your JARO representative for further information.

\*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.