



DC FANS

40x40x20mm




- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 27g



JARO Part Number	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
	B / F	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JCD0402012LB1A0E	B	12	0.10	5000	0.21	6.7	4.83	0.19	23
JCD0402012MB1A0E	B	12	0.12	6500	0.22	8.4	8.13	0.32	27
JCD0402012HB1A0E	B	12	0.16	8600	0.28	9.8	10.92	0.43	36
JCD0402012UB1A0E	B	12	0.22	9500	0.31	11.0	11.94	0.47	37
JCD0402024LB1A0E	B	24	0.07	5000	0.21	6.7	4.83	0.19	23
JCD0402024MB1A0E	B	24	0.09	6500	0.22	8.4	8.13	0.32	27
JCD0402024HB1A0E	B	24	0.13	8600	0.28	9.8	10.92	0.43	36

*Bearing system B:two ball bearing

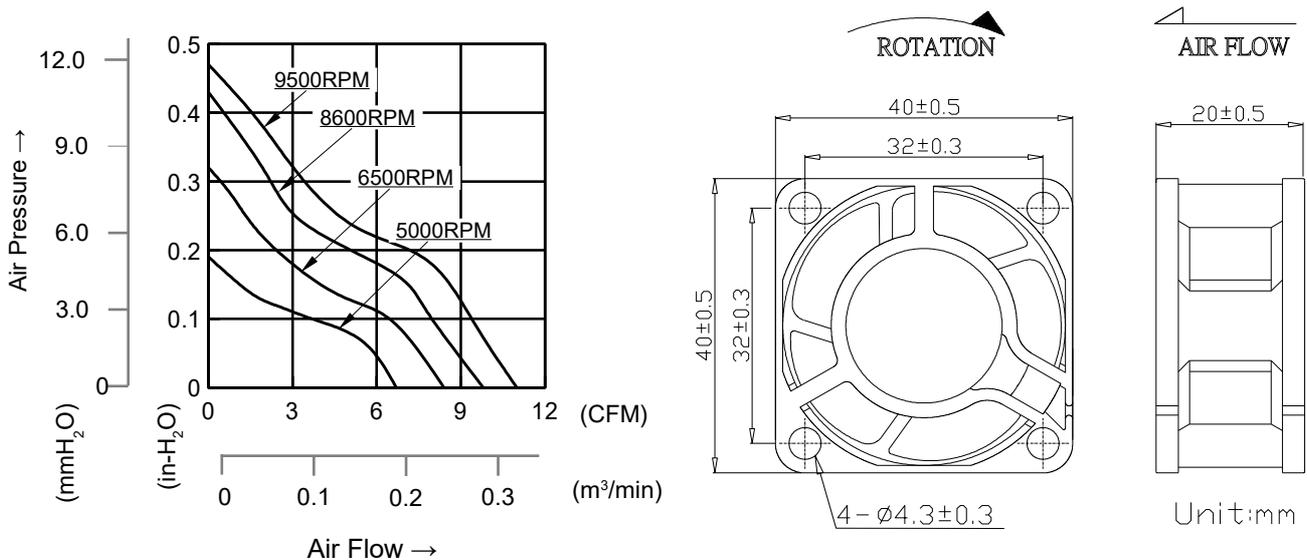

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.



DC FANS

40x40x20mm




- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 27g



JARO Part Number	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
	B / F	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JCD0402012LF1A0S	F	12	0.10	5000	0.21	7.4	4.83	0.19	21
JCD0402012MF1A0S	F	12	0.12	6500	0.22	9.6	8.13	0.32	25
JCD0402012HF1A0S	F	12	0.16	8600	0.31	11.1	10.92	0.43	33
JCD0402024LF1A0S	F	24	0.07	5000	0.21	7.4	11.94	0.19	21
JCD0402024MF1A0S	F	24	0.09	6500	0.22	9.6	4.83	0.32	25
JCD0402024HF1A0S	F	24	0.13	8600	0.31	11.1	10.92	0.43	33

*Bearing system F:fluid bearing

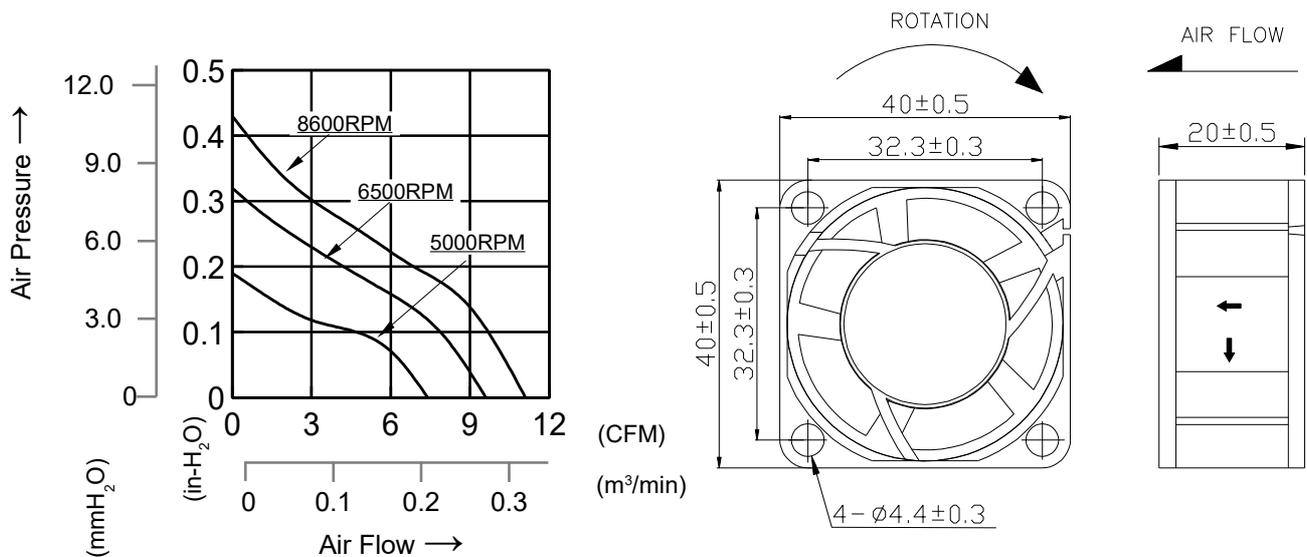

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.



DC FANS

40x40x20mm




- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 45g



JARO Part Number	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
	B / F	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JCD0402012LB1A0B	B	12	0.08	8000	0.27	9.4	8.89	0.35	33
JCD0402012MB1A0B	B	12	0.11	10000	0.33	11.7	13.97	0.55	40
JCD0402012HB1A0B	B	12	0.17	12000	0.41	14.3	20.07	0.79	44
JCD0402012UB1A0B	B	12	0.25	14000	0.48	16.8	27.43	1.08	49
JCD0402012VB1A0B	B	12	0.41	16000	0.56	19.8	36.58	1.44	53
JCD0402024HB1A0B	B	24	0.13	12000	0.41	14.3	20.07	0.79	44
JCD0402024UB1A0B	B	24	0.15	14000	0.48	16.8	27.43	1.08	49
JCD0402024VB1A0B	B	24	0.18	16000	0.56	19.8	36.58	1.44	53

*Bearing system B:two ball bearing

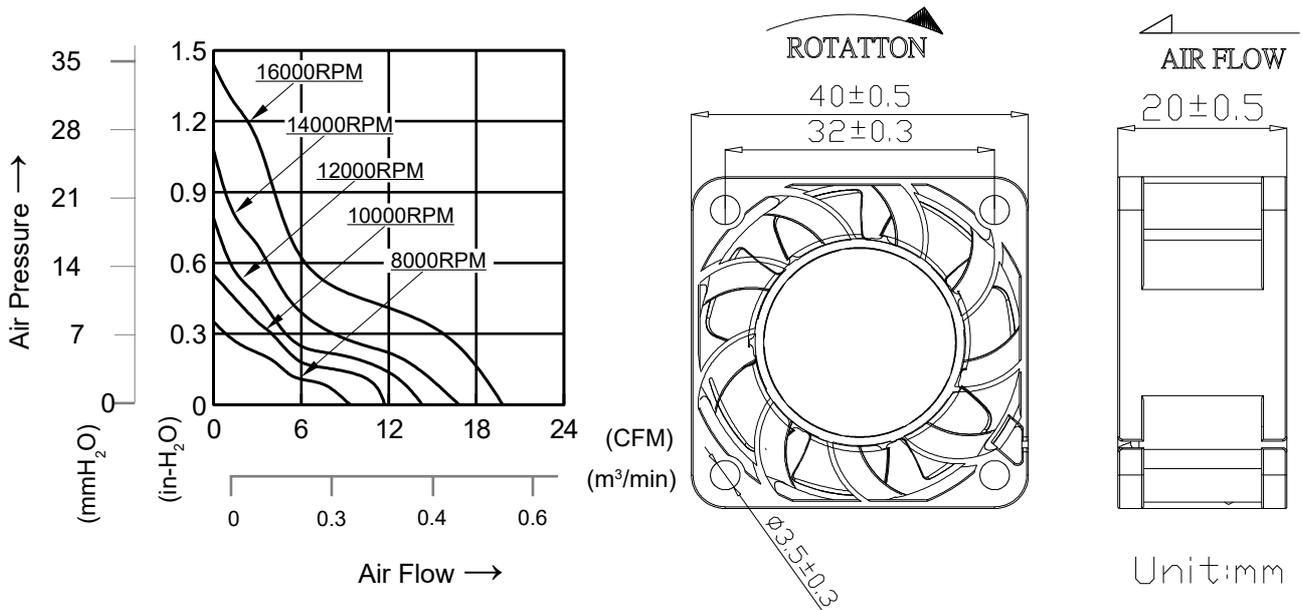

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.