



## DC FANS

**40x40x28mm**





- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 50g



JARO Part Number	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
	B / F	V	A	RPM	m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	In-H <sub>2</sub> O	dBA
JCD0402812VB1A0D	B	12	1.1	21000	0.83	29.5	73.41	2.89	62
JCD0402812WB1A0D	B	12	1.4	23000	0.89	31.3	76.71	3.02	64

\*Bearing system B:two ball bearing

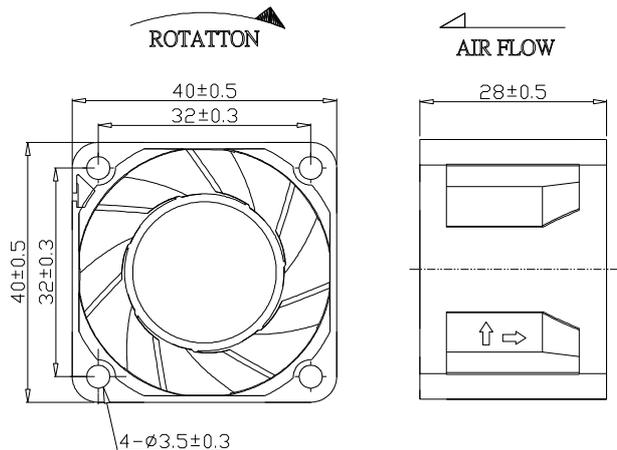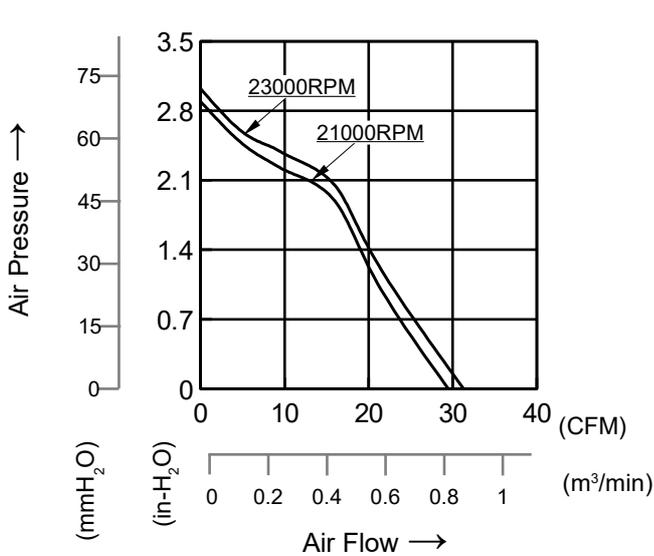

\*All models can be customized. Please contact your JARO representative for further information.

\*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.



## DC FANS

### 40x40x28mm





- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 58g



JARO Part Number	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
	B / F	V	A	RPM	m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	In-H <sub>2</sub> O	dBA
JCD0402812LB1A0B	B	12	0.14	8000	0.40	13.8	11.68	0.46	38
JCD0402812MB1A0B	B	12	0.26	9500	0.45	15.9	17.53	0.69	44
JCD0402812HB1A0B	B	12	0.35	11000	0.53	18.7	23.37	0.92	51
JCD0402812UB1A0B	B	12	0.55	13000	0.67	23.8	33.53	1.32	54
JCD0402812VB1A0B	B	12	0.64	15000	0.70	24.8	41.66	1.64	58
JCD0402824LB1A0B	B	24	0.10	8000	0.40	13.8	11.68	0.46	38
JCD0402824MB1A0B	B	24	0.15	9500	0.45	15.9	17.53	0.69	44
JCD0402824HB1A0B	B	24	0.20	11000	0.53	18.7	23.37	0.92	51
JCD0402824UB1A0B	B	24	0.27	13000	0.67	23.8	33.53	1.32	54

\*Bearing system B:two ball bearing

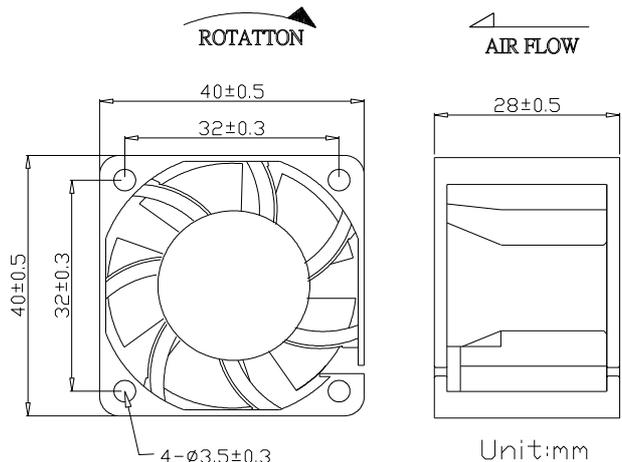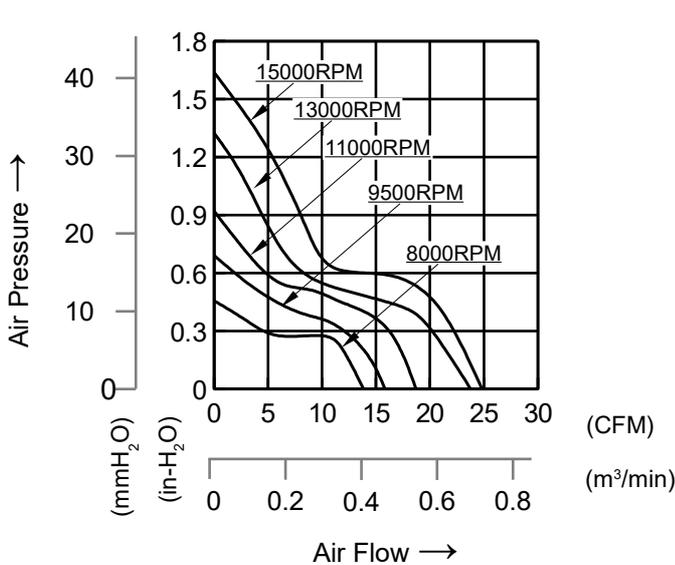

\*All models can be customized. Please contact your JARO representative for further information.

\*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.



## DC FANS

**40x40x28mm**





- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 49g



JARO Part Number	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
	B / F	V	A	RPM	m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	In-H <sub>2</sub> O	dBA
JCD0402812HB1A0V	B	12	0.3	13000	0.43	15.2	23.37	0.92	43
JCD0402812UB1A0V	B	12	0.4	15000	0.51	17.8	30.48	1.20	46
JCD0402812VB1A0V	B	12	0.6	17000	0.61	21.3	38.86	1.53	50

\*Bearing system B:two ball bearing

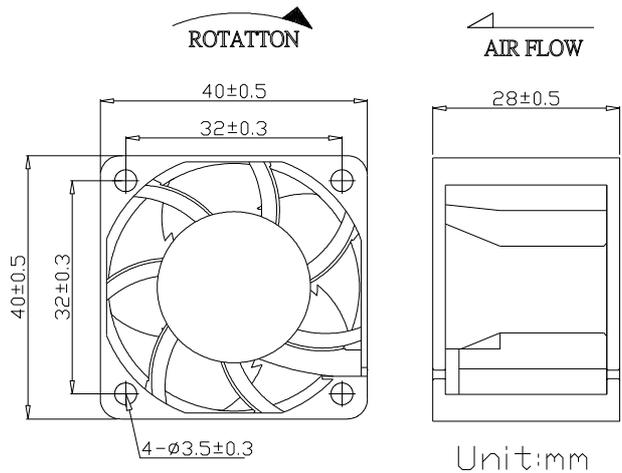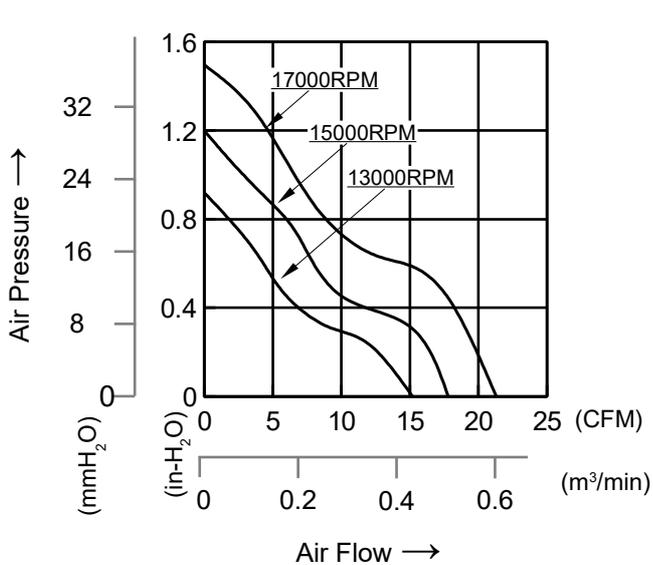

\*All models can be customized. Please contact your JARO representative for further information.

\*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.



## DC FANS





**40x40x28mm**

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 50g



JARO Part Number	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
	B / F	V	A	RPM	m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	In-H <sub>2</sub> O	dBA
JCD0402812UB1A0K	B	12	0.75	21000	0.67	23.52	32.00	1.26	60
JCD0402812VB1A0K	B	12	0.9	23000	0.73	25.76	38.35	1.51	62
JCD0402812WB1A0K	B	12	1.0	25000	0.84	28.00	45.47	1.79	65

\*Bearing system B:two ball bearing

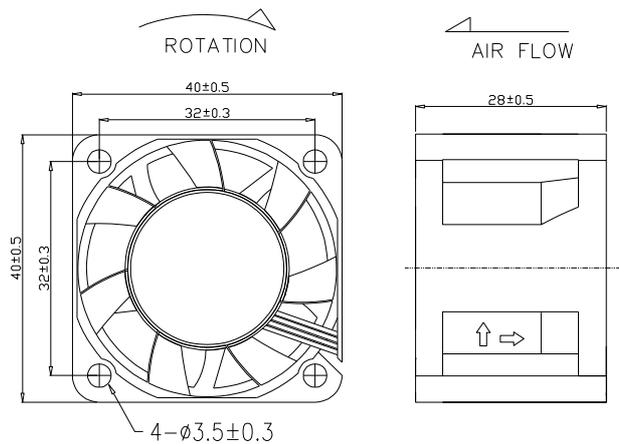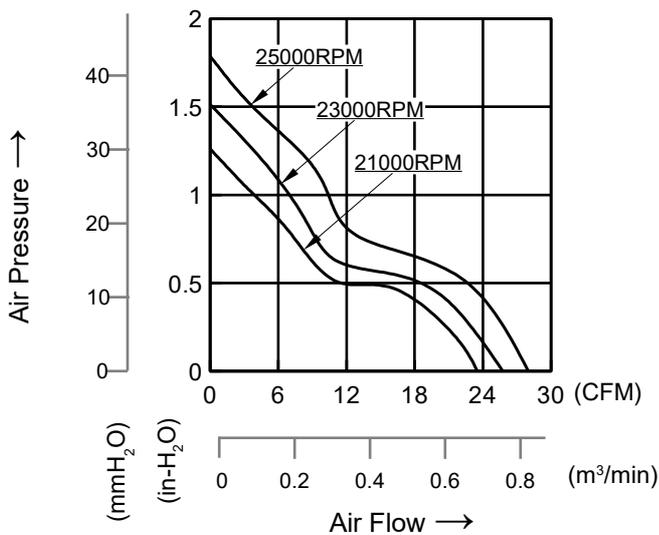

\*All models can be customized. Please contact your JARO representative for further information.

\*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.