JRB2235 SERIES

Frame: Plastic (UL:94V-0)
Impeller: Plastic (UL:94V-0)
Bearing:Hydraulic bearing.
Lead Wire: UL1007 AWG 28
Voltage Available: 5V

External Dimensions

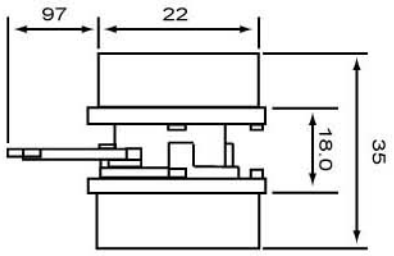

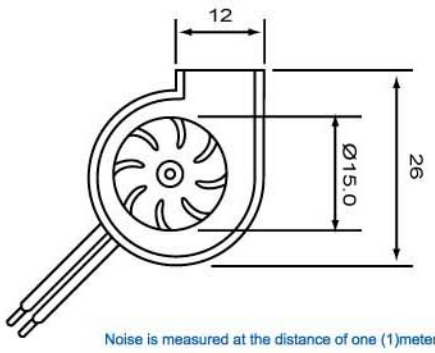

Noise is measured at the distance of one (1)meter from the axis og intake.

Bearing type:◎=Ball ※=Sleeve○=1B1S ●= Hydraulic Bearing

Specifications(Nominal)

Frame size (mm)	JARO Model No.	Rated (V)	Bearing System Type	Volt. (V)	Current (A)	Rated Speed (rpm)	Maximum Air Flow (CMM)	Maximum Air Flow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	Noise Level (dB/A)
22x26x35	JRB2235-5	5		5.0	0.08	8500	0.0339	1.2	0.122	3.1	40

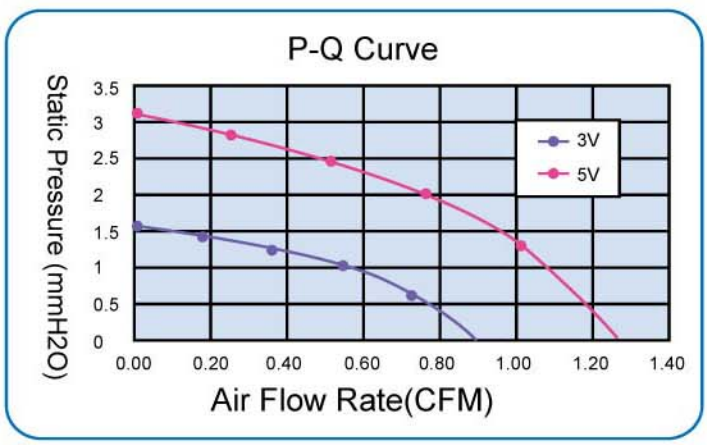

0	1	2	3
Impedance	By IC	RD	FG
	✓		✓

6	9	B	F
Impedance +FG	PWM	PWM+FG	PWM+RD

●Motor protective circuit and third lead wire functions

✓	✓			✓

●Safety approvals

Specifications subject to change without notice.