




JRB3004 SERIES

DC Blowers



Frame: Plastic (UL:94V-0)
 Impeller: Plastic (UL:94V-0)
 Bearing:Hydraulic bearing
 Lead Wire: UL 1571 AWG 32 or 30
 Voltage Available: 5V

External Dimensions

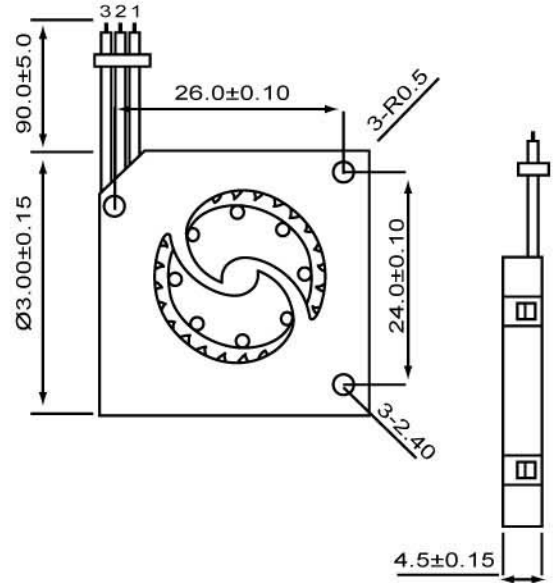


Noise is measured at the distance of one (1) meter from the axis og intake.

Bearing type: ⊙=Ball ※=Sleeve ○=1B1S ●=Hydraulic Bearing

Specifications(Nominal)

Frame size (mm)	JARO Model No.	Rated (V)	Bearing System Type	Volt. (V)	Current (A)	Rated Speed (rpm)	Maximum Air Flow (CMM) (CFM)	Maximum Pressure (InAq) (mmAq)	Noise Level (dB/A)
30x30x4.5	JRB3004-5	5		5.0	0.025	5 200	0.0093 0.33	0.074 1.87	23

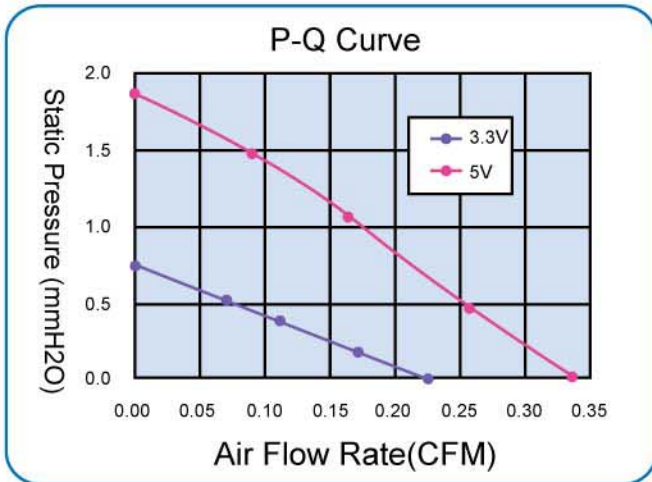

	0	1	2	3
Impedance		By IC	RD	FG
		✓		✓
	6	9	B	F
Impedance +FG		PWM	PWM+FG	PWM+RD

•Motor protective circuit and third lead wire functions

✓	✓			✓

•Safety approvals