


Single-Stage Thermoelectric Modules

(Grain size is equal to or greater than 1mm)



It can meet the requirements of most medium to high power cooling or heating applications and is widely used in industries such as electronics, scientific instruments, medical and biotechnology equipment, and consumer appliances.

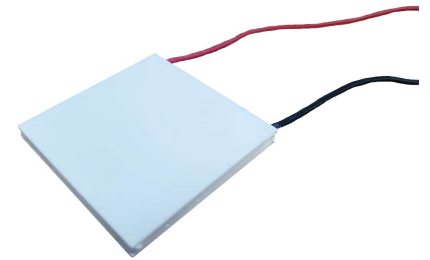

P/N	I max (A)	U max (V)	ΔT Max (°C)	QC Max (W)	Dimension (mm)
TEC1-00703	3.10	0.80	66	1.50	10*10*5
TEC1-01707	7.15	2.00	68	8.30	15*15*4
TEC1-03106	6.00	3.70	68	13.00	20*20*4
TEC1-03114	14.20	3.70	71	29.30	30*30*5
TEC1-04909	9.20	5.90	71	29.70	36*36*6
TEC1-04914	14.15	5.90	71	46.00	36*36*5
TEC1-06308	8.20	7.10	68	37.00	20*40*4
TEC1-07107	7.30	8.50	68	34.80	30*30*4
TEC1-07110	10.15	8.50	68	49.70	30*30*3
TEC1-09605	5.20	11.50	63	32.60	40*40*4
TEC1-11104	4.10	13.30	65	34.00	39*36*4
TEC1-12704	4.20	15.20	68	35.60	40*40*5
TEC1-12709	9.00	15.40	71	77.00	62*62*6
TEC1-16104	4.15	19.50	70	47.00	45*45*5
TEC1-16106	6.20	19.30	65	65.60	40*40*4
TEC1-16110	10.10	19.50	69	112.70	45*45*4
TEC1-19906	6.10	23.80	69	81.00	50*50*4
TEC1-19912	12.30	24.00	70	167.00	50*50*4
TEC1-19920	20.40	24.00	70	278.60	50*50*4
TEC1-19930	30.30	24.00	68	417.90	50*50*3
TEC1-24107	7.10	29.00	70	118.50	50*50*4
TEC1-24110	10.15	29.00	70	168.70	50*50*4
TEC1-24115	15.20	29.00	70	270.00	50*50*4
TEC1-24120	20.20	29.00	68	360.00	50*50*3
TEC1-27906	6.10	33.00	69	113.80	50*69*4

We keep the world cool™
www.jarothermal.com