

DC FAN





172x150x51mm

- MOTOR : DC single phase brushless motor
- FRAME : METAL ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 610g
- SAFETY : UL / CUL / CE



JARO Part Number	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
	B / F	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBa
JCD1725124JB1A0E	B	24	0.75	3500	7.44	263.0	20.83	0.82	57
JCD1725124LB1A0E	B	24	1.00	4000	8.24	291.0	23.11	0.91	62
JCD1725124MB1A0E	B	24	1.40	4400	9.14	323.0	26.92	1.06	64
JCD1725124HB1A0E	B	24	1.60	4800	9.90	350.0	31.50	1.24	66
JCD1725124UB1A0E	B	24	2.40	5200	10.70	378.0	34.54	1.36	68
JCD1725148JB1A0E	B	48	0.50	3500	7.44	263.0	20.83	0.82	57
JCD1725148LB1A0E	B	48	0.50	4000	8.24	291.0	23.11	0.91	62
JCD1725148MB1A0E	B	48	0.70	4400	9.14	323.0	26.92	1.06	64
JCD1725148HB1A0E	B	48	0.80	4800	9.90	350.0	31.50	1.24	66
JCD1725148UB1A0E	B	48	1.00	5200	10.70	378.0	34.54	1.36	68
JCD1725148VB1A0E	B	48	2.30	6500	13.37	472.5	53.85	2.12	73

*Bearing system B:two ball bearing

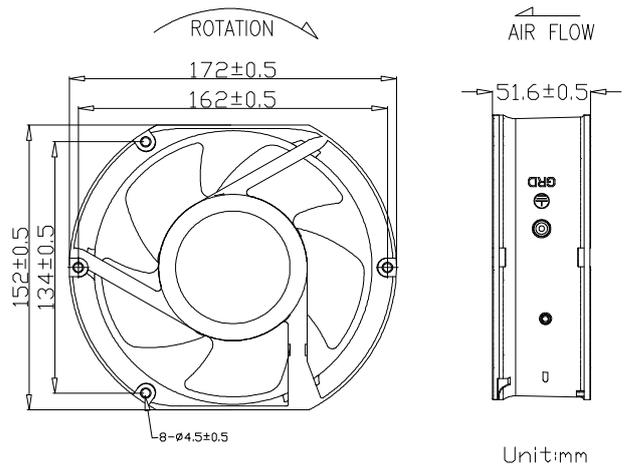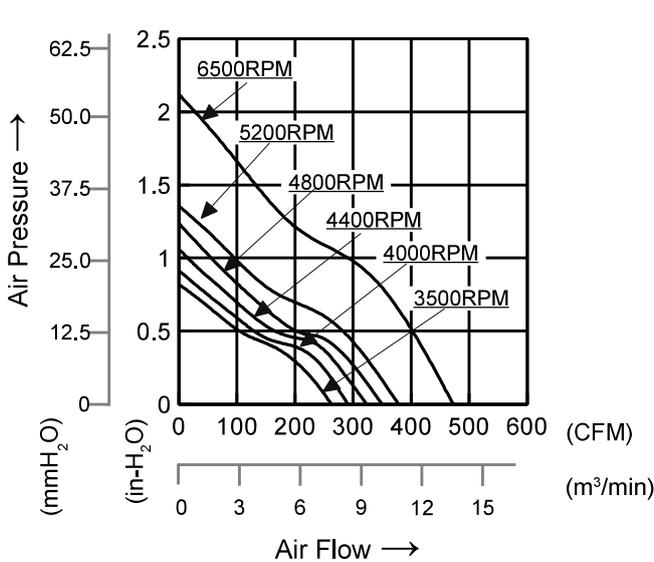

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC FAN




172x150x51mm

- MOTOR : DC single phase brushless motor
- FRAME : METAL ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 700g
- SAFETY : UL / CUL / CE



JARO Part Number	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
	B / F	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JCD1725124LB1A0F	B	24	1.40	4000	9.57	338.06	29.97	1.18	58.4
JCD1725124MB1A0F	B	24	1.88	4400	10.39	367.07	36.58	1.44	61.9
JCD1725124HB1A0F	B	24	2.66	4800	11.92	421.20	43.18	1.70	64.9
JCD1725124UB1A0F	B	24	3.20	5200	12.26	433.08	45.97	1.81	65.4
JCD1725148LB1A0F	B	48	0.80	4000	9.57	338.06	29.97	1.18	58.4
JCD1725148MB1A0F	B	48	0.97	4400	10.39	367.07	36.58	1.44	61.9
JCD1725148HB1A0F	B	48	1.46	4800	11.92	421.20	43.18	1.70	64.9
JCD1725148UB1A0F	B	48	1.52	5200	12.26	433.08	45.97	1.81	65.4

*Bearing system B: two ball bearing

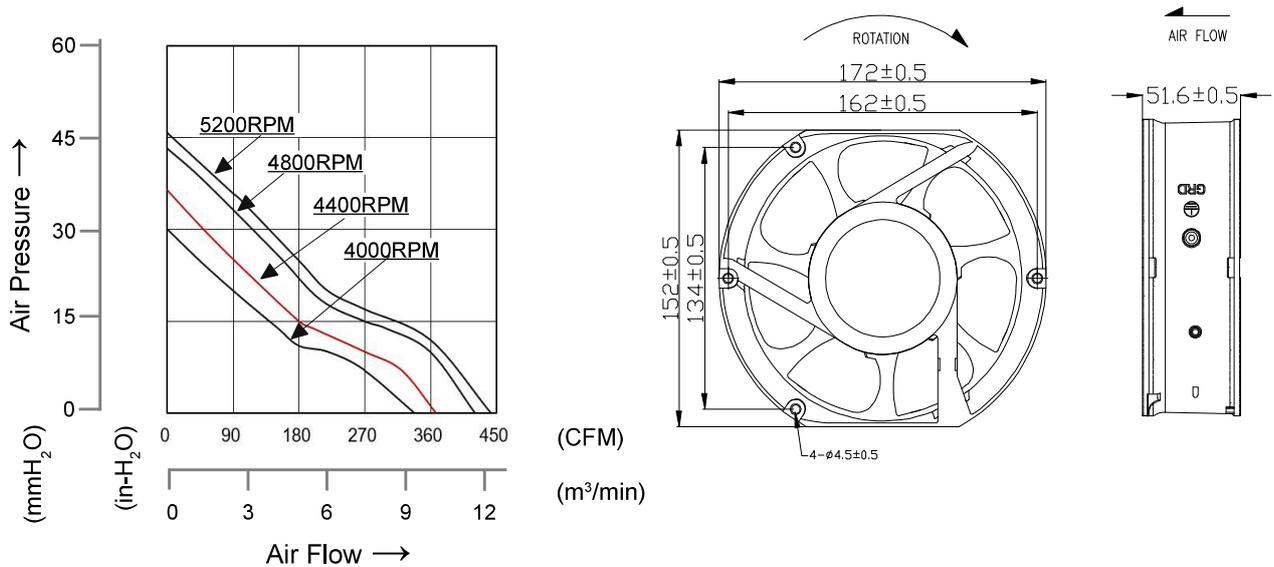

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.