

DC BRACKET FAN





60x60x10mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 20.4g
- SAFETY : UL/CUL/CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSY0601005L_1A01	B / S	5	0.15	3000	0.303	10.74	2.64	0.103	21.6
JSY0601005M_1A01	B / S	5	0.39	4000	0.405	14.32	3.52	0.138	28.8
JSY0601012L_1A01	B / S	12	0.06	3000	0.303	10.74	2.64	0.103	21.6
JSY0601012M_1A01	B / S	12	0.15	4000	0.405	14.32	3.52	0.138	28.8
JSY0601012H_1A01	B / S	12	0.25	4500	0.455	16.11	3.97	0.156	30.8
JSY0601012U_1A01	B / S	12	0.37	5000	0.506	17.89	4.41	0.173	33.1
JSY0601024L_1A01	B / S	24	0.03	3000	0.303	10.74	2.64	0.103	21.6
JSY0601024M_1A01	B / S	24	0.07	4000	0.405	14.32	3.52	0.138	28.8
JSY0601024H_1A01	B / S	24	0.12	4500	0.455	16.11	3.97	0.156	30.8
JSY0601024U_1A01	B / S	24	0.18	5000	0.506	17.89	4.41	0.173	33.1

*Bearing system B:two ball bearing S:sleeve

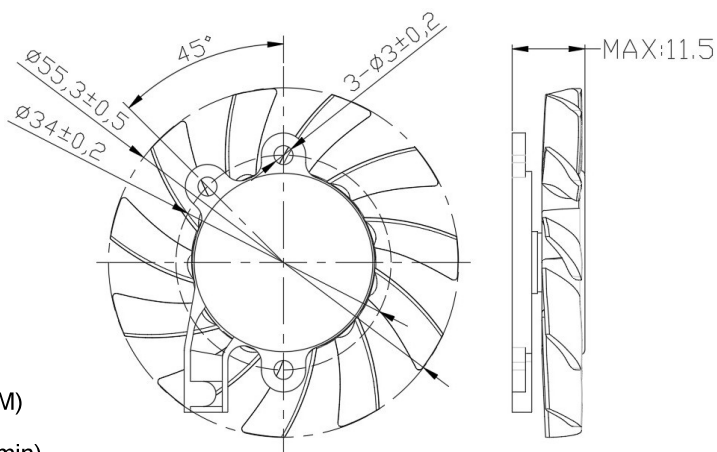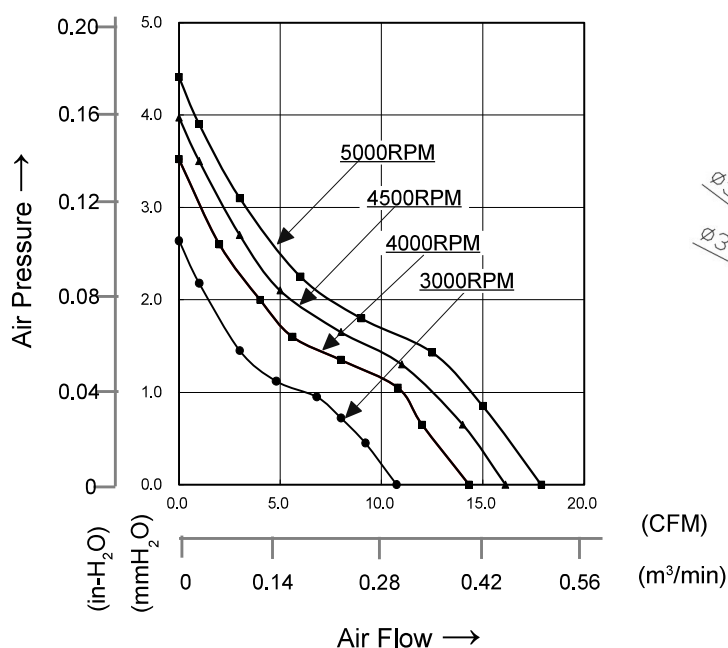

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.