

DC BRACKET FAN





75x75x32mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 92.0g
- SAFETY : UL/CUL/CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSY0753212L_1A01	B / S	12	0.76	3500	0.540	19.10	15.90	0.625	45.0
JSY0753212M_1A01	B / S	12	0.98	4500	0.694	24.54	20.45	0.805	49.0
JSY0753212H_1A01	B / S	12	1.20	5500	0.849	30.00	25.00	0.984	56.8
JSY0753224L_1A01	B / S	24	0.37	3500	0.540	19.10	15.90	0.625	45.0
JSY0753224M_1A01	B / S	24	0.47	4500	0.694	24.54	20.45	0.805	49.0
JSY0753224H_1A01	B / S	24	0.58	5500	0.849	30.00	25.00	0.984	56.8
JSY0753248L_1A01	B / S	48	0.19	3500	0.540	19.10	15.90	0.625	45.0
JSY0753248M_1A01	B / S	48	0.25	4500	0.694	24.54	20.45	0.805	49.0
JSY0753248H_1A01	B / S	48	0.30	5500	0.849	30.00	25.00	0.984	56.8

*Bearing system B:two ball bearing S:sleeve

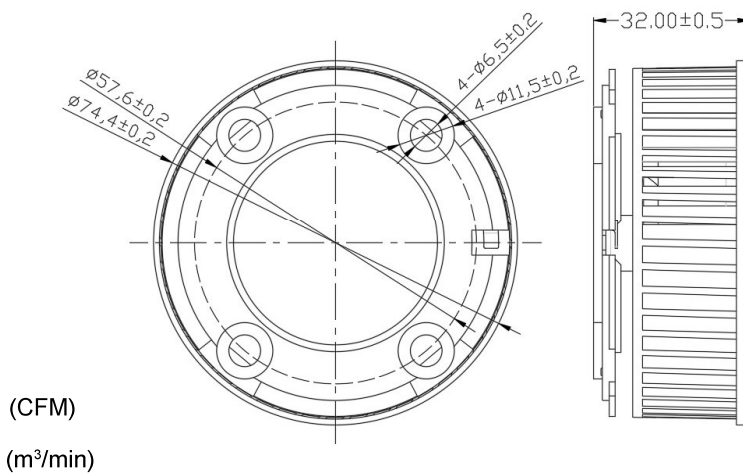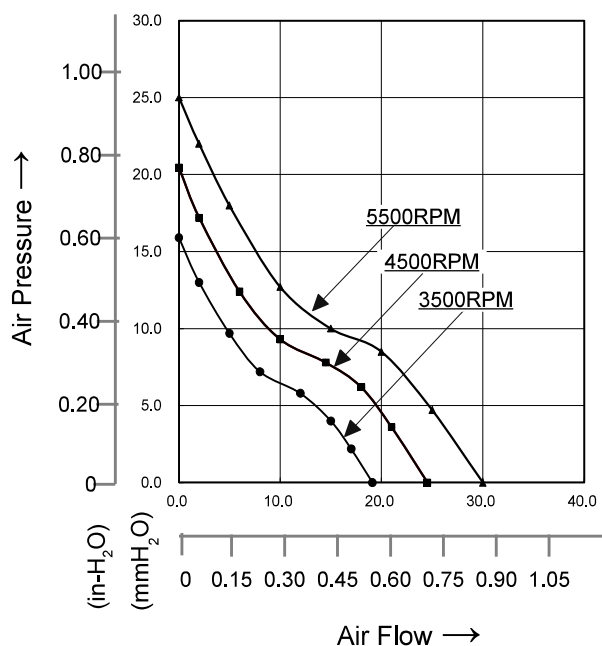

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.