


DC BRACKET FAN





80x80x15mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PC(94V-2)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 46.8g
- SAFETY : UL/CUL/CE

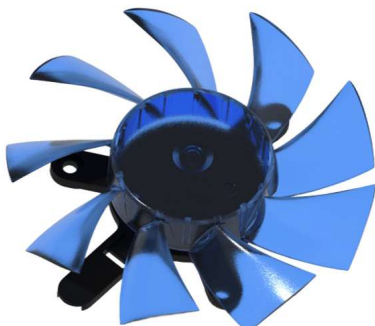

JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSY0801505L_1A01	B / S	5	0.09	1500	0.414	14.64	1.43	0.056	19.8
JSY0801505M_1A01	B / S	5	0.17	2000	0.552	19.53	1.91	0.075	24.6
JSY0801505H_1A01	B / S	5	0.32	2500	0.690	24.41	2.39	0.094	28.7
JSY0801505U_1A01	B / S	5	0.70	3200	0.884	31.24	3.05	0.120	32.1
JSY0801512L_1A01	B / S	12	0.04	1500	0.414	14.64	1.43	0.056	19.8
JSY0801512M_1A01	B / S	12	0.07	2000	0.552	19.53	1.91	0.075	24.6
JSY0801512H_1A01	B / S	12	0.13	2500	0.690	24.41	2.39	0.094	28.7
JSY0801512U_1A01	B / S	12	0.28	3200	0.884	31.24	3.05	0.120	32.1
JSY0801524L_1A01	B / S	24	0.02	1500	0.414	14.64	1.43	0.056	19.8
JSY0801524M_1A01	B / S	24	0.03	2000	0.552	19.53	1.91	0.075	24.6
JSY0801524H_1A01	B / S	24	0.06	2500	0.690	24.41	2.39	0.094	28.7
JSY0801524U_1A01	B / S	24	0.13	3200	0.884	31.24	3.05	0.120	32.1

*Bearing system B:two ball bearing S:sleeve

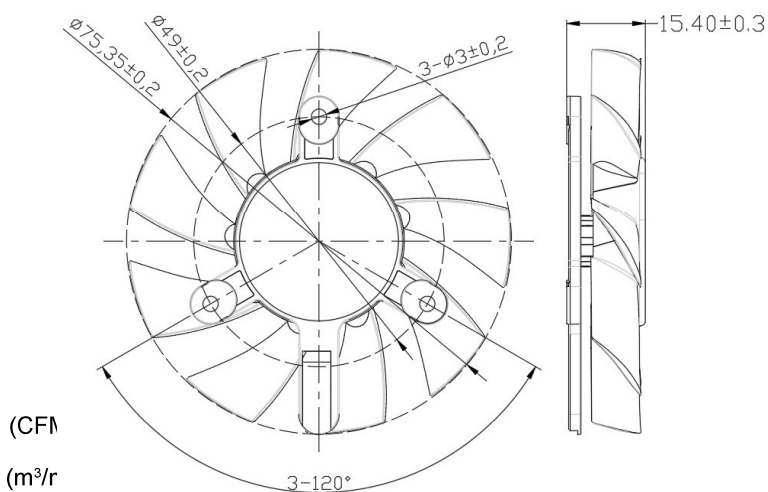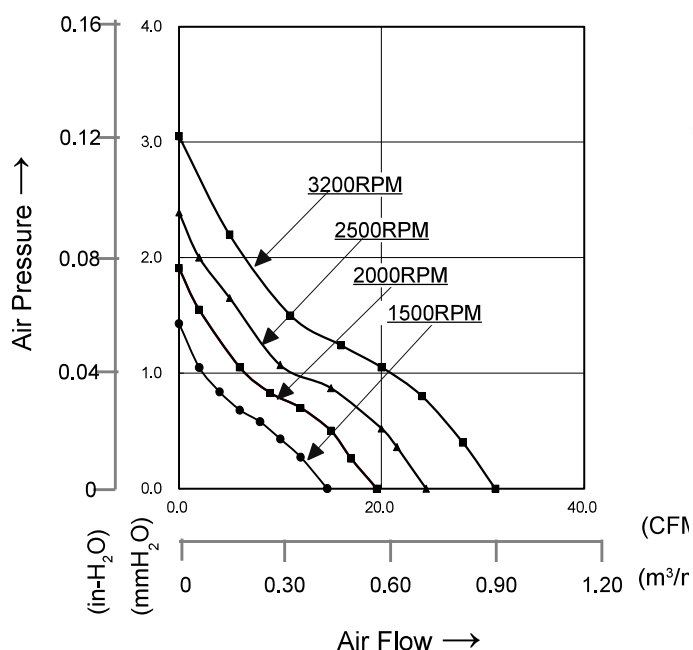

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.