

DC BRACKET FAN





40x40x08mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 5.0g
- SAFETY : UL/CUL/CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JPY0400805M_1A01	B / A	5	0.15	5000	0.201	7.12	2.31	0.090	26.0
JPY0400805H_1A01	B / A	5	0.18	6000	0.247	8.73	3.25	0.127	30.0
JPY0400812M_1A01	B / A	12	0.10	5000	0.201	7.12	2.31	0.090	26.0
JPY0400812H_1A01	B / A	12	0.15	6000	0.247	8.73	3.25	0.127	30.0

*Bearing system B:two ball bearing A:AFB (AEROSPACE FLUID BEARING)

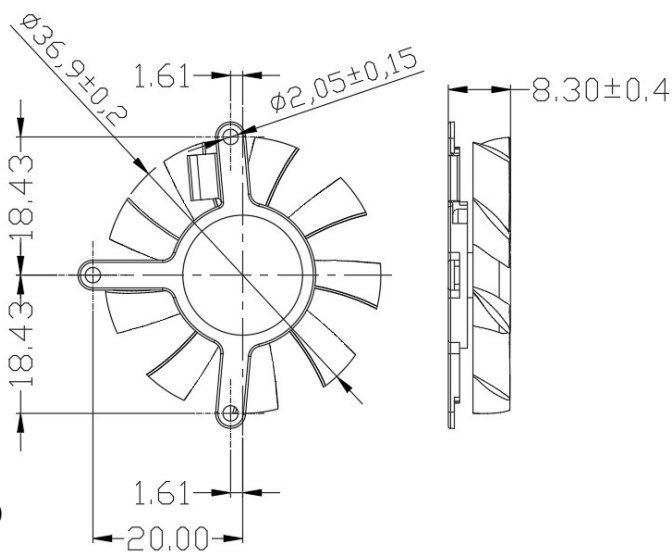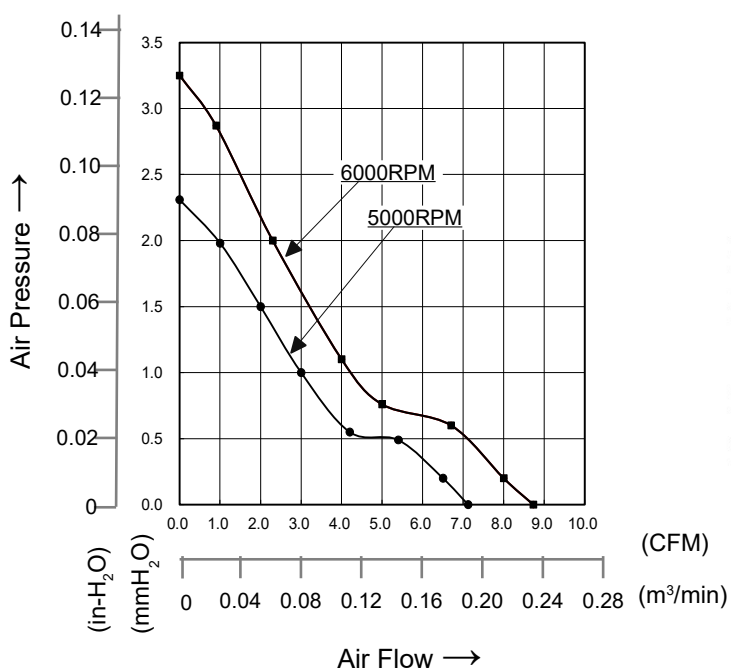

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC BRACKET FAN





40x40x10mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 14.1g
- SAFETY : UL/CUL/CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSY0401005L_1A01	B / S	5	0.07	3000	0.053	1.90	1.92	0.075	18.0
JSY0401005M_1A01	B / S	5	0.15	4000	0.071	2.53	2.56	0.100	22.0
JSY0401005H_1A01	B / S	5	0.25	5000	0.089	3.16	3.20	0.125	27.0
JSY0401005U_1A01	B / S	5	0.45	6000	0.107	3.80	3.84	0.151	31.0
JSY0401012L_1A01	B / S	12	0.03	3000	0.053	1.90	1.92	0.075	18.0
JSY0401012M_1A01	B / S	12	0.06	4000	0.071	2.53	2.56	0.100	22.0
JSY0401012H_1A01	B / S	12	0.10	5000	0.089	3.16	3.20	0.125	27.0
JSY0401012U_1A01	B / S	12	0.18	6000	0.107	3.80	3.84	0.151	31.0
JSY0401024L_1A01	B / S	24	0.02	3000	0.053	1.90	1.92	0.075	18.0
JSY0401024M_1A01	B / S	24	0.03	4000	0.071	2.53	2.56	0.100	22.0
JSY0401024H_1A01	B / S	24	0.05	5000	0.089	3.16	3.20	0.125	27.0
JSY0401024U_1A01	B / S	24	0.09	6000	0.107	3.80	3.84	0.151	31.0

*Bearing system B:two ball bearing S:sleeve

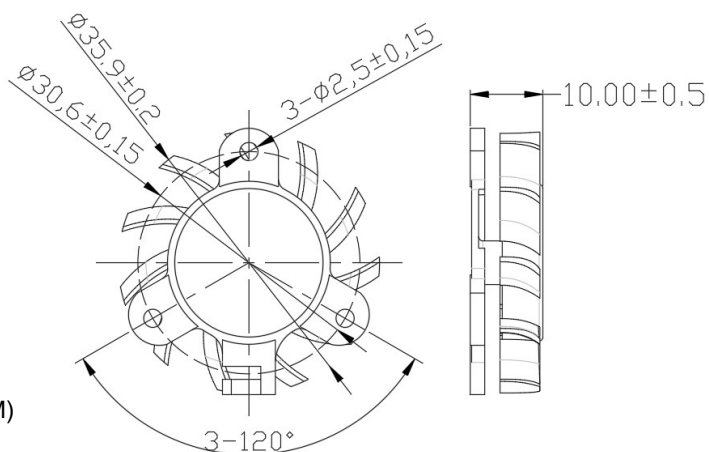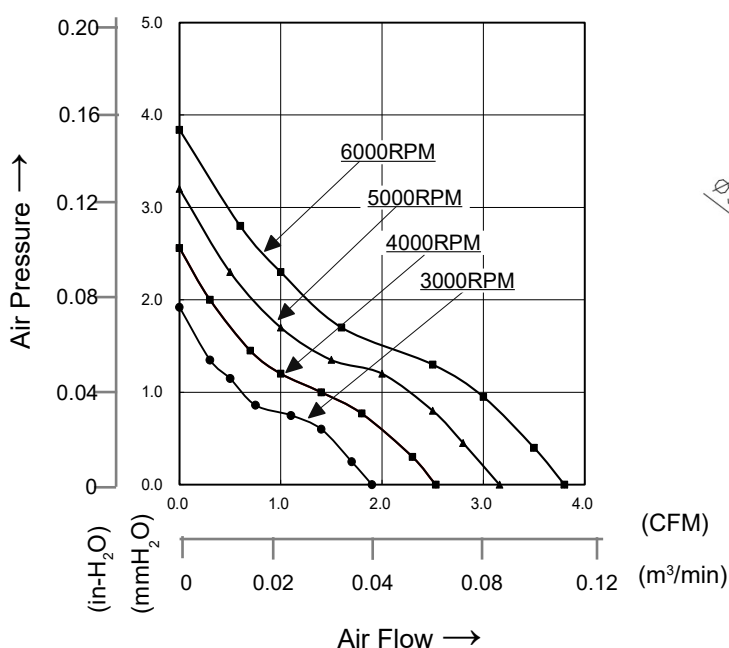

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC BRACKET FAN





50x50x10mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 16.9g
- SAFETY : UL/CUL/CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSY0501005L_1A04	B / S	5	0.15	4000	0.243	8.60	2.97	0.116	27.0
JSY0501005M_1A04	B / S	5	0.20	5000	0.324	11.45	3.33	0.131	32.0
JSY0501012L_1A04	B / S	12	0.06	4000	0.243	8.60	2.97	0.116	27.0
JSY0501012M_1A04	B / S	12	0.08	5000	0.324	11.45	3.33	0.131	32.0
JSY0501012H_1A04	B / S	12	0.14	6000	0.337	11.93	4.50	0.177	36.0
JSY0501012U_1A04	B / S	12	0.20	6500	0.402	14.23	5.01	0.197	37.5
JSY0501024L_1A04	B / S	24	0.03	4000	0.243	8.60	2.97	0.116	27.0
JSY0501024M_1A04	B / S	24	0.04	5000	0.324	11.45	3.33	0.131	32.0
JSY0501024H_1A04	B / S	24	0.07	6000	0.337	11.93	4.50	0.177	36.0
JSY0501024U_1A04	B / S	24	0.10	6500	0.402	14.23	5.01	0.197	37.5

*Bearing system B:two ball bearing S:sleeve

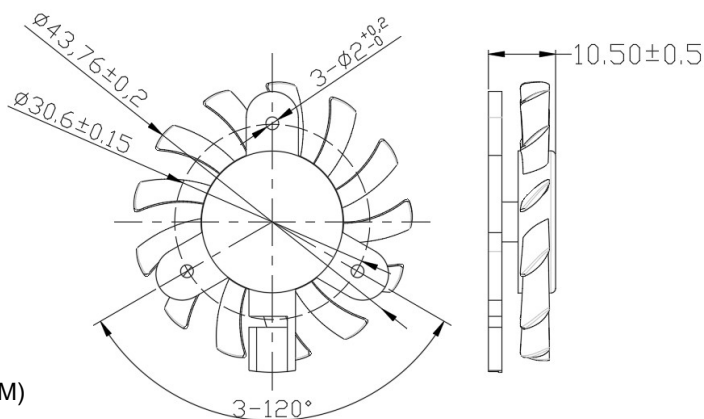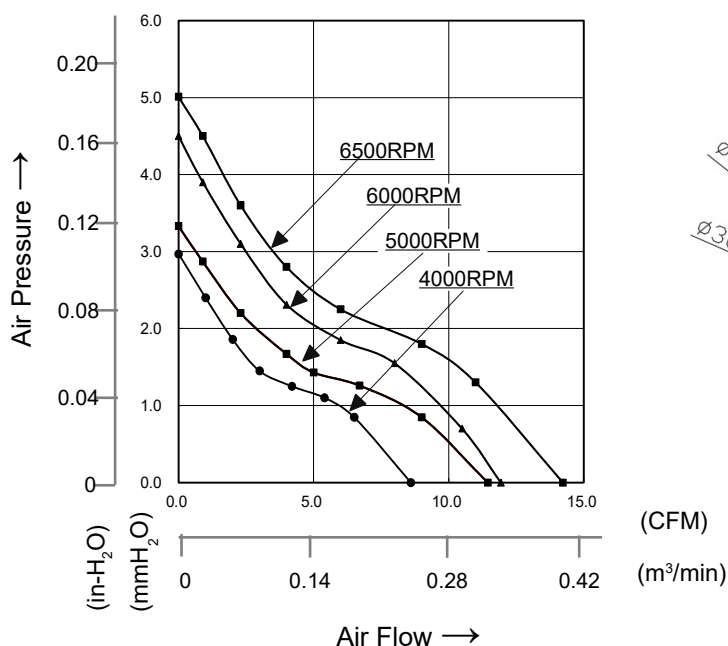

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC BRACKET FAN





60x60x10mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 20.4g
- SAFETY : UL/CUL/CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSY0601005L_1A01	B / S	5	0.15	3000	0.303	10.74	2.64	0.103	21.6
JSY0601005M_1A01	B / S	5	0.39	4000	0.405	14.32	3.52	0.138	28.8
JSY0601012L_1A01	B / S	12	0.06	3000	0.303	10.74	2.64	0.103	21.6
JSY0601012M_1A01	B / S	12	0.15	4000	0.405	14.32	3.52	0.138	28.8
JSY0601012H_1A01	B / S	12	0.25	4500	0.455	16.11	3.97	0.156	30.8
JSY0601012U_1A01	B / S	12	0.37	5000	0.506	17.89	4.41	0.173	33.1
JSY0601024L_1A01	B / S	24	0.03	3000	0.303	10.74	2.64	0.103	21.6
JSY0601024M_1A01	B / S	24	0.07	4000	0.405	14.32	3.52	0.138	28.8
JSY0601024H_1A01	B / S	24	0.12	4500	0.455	16.11	3.97	0.156	30.8
JSY0601024U_1A01	B / S	24	0.18	5000	0.506	17.89	4.41	0.173	33.1

*Bearing system B:two ball bearing S:sleeve

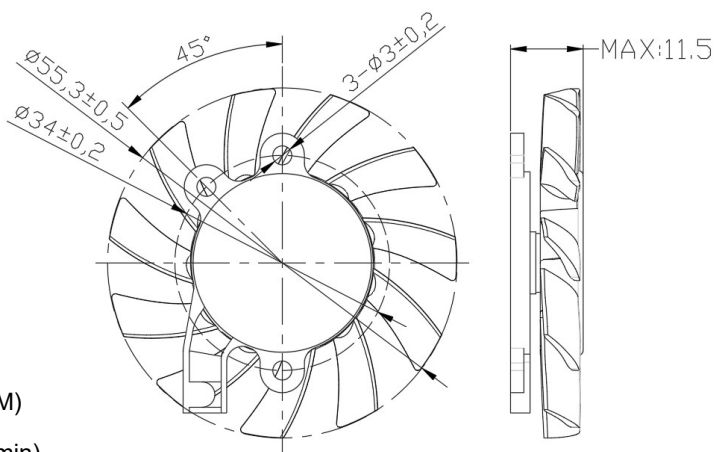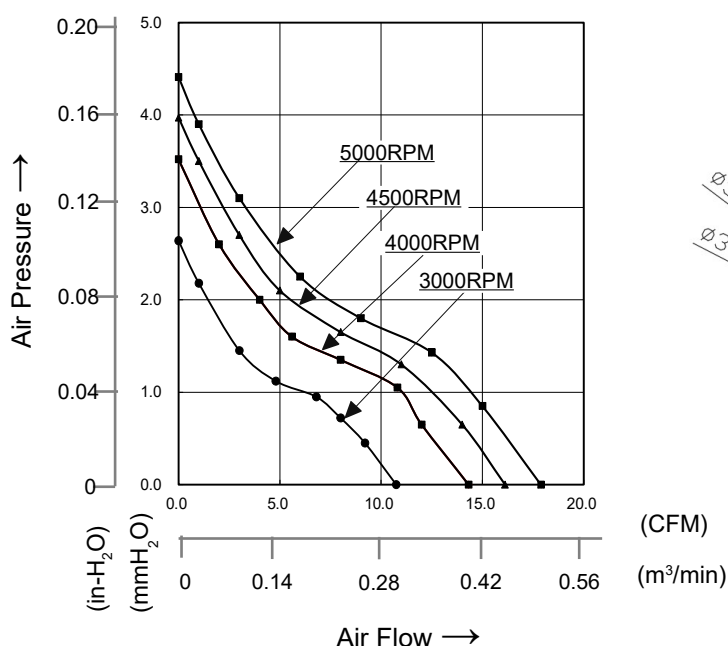

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC BRACKET FAN





60x60x15mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 20.4g
- SAFETY : UL/CUL/CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSY0601505L_1A01	B / S	5	0.18	2000	0.131	4.64	0.38	0.014	22.5
JSY0601505M_1A01	B / S	5	0.23	2500	0.163	5.79	0.59	0.023	27.4
JSY0601505H_1A01	B / S	5	0.40	3000	0.196	6.95	0.85	0.033	31.3
JSY0601512L_1A01	B / S	12	0.10	2000	0.131	4.64	0.38	0.014	22.5
JSY0601512M_1A01	B / S	12	0.11	2500	0.163	5.79	0.59	0.023	27.4
JSY0601512H_1A01	B / S	12	0.20	3000	0.196	6.95	0.85	0.033	31.3
JSY0601524L_1A01	B / S	24	0.05	2000	0.131	4.64	0.38	0.014	22.5
JSY0601524M_1A01	B / S	24	0.05	2500	0.163	5.79	0.59	0.023	27.4
JSY0601524H_1A01	B / S	24	0.09	3000	0.196	6.95	0.85	0.033	31.3


*Bearing system B:two ball bearing S:sleeve

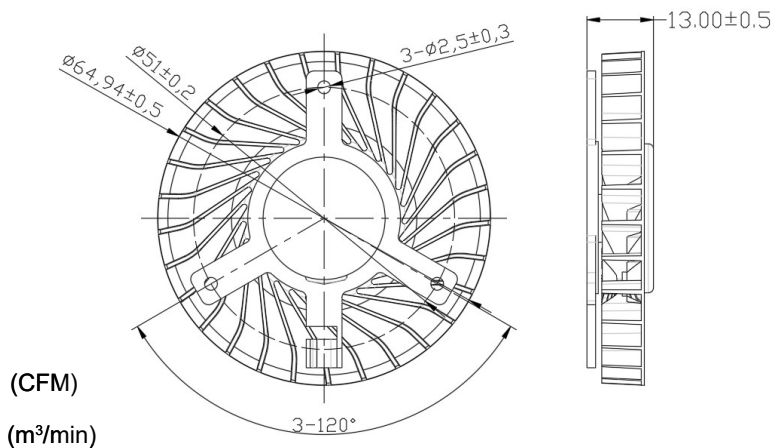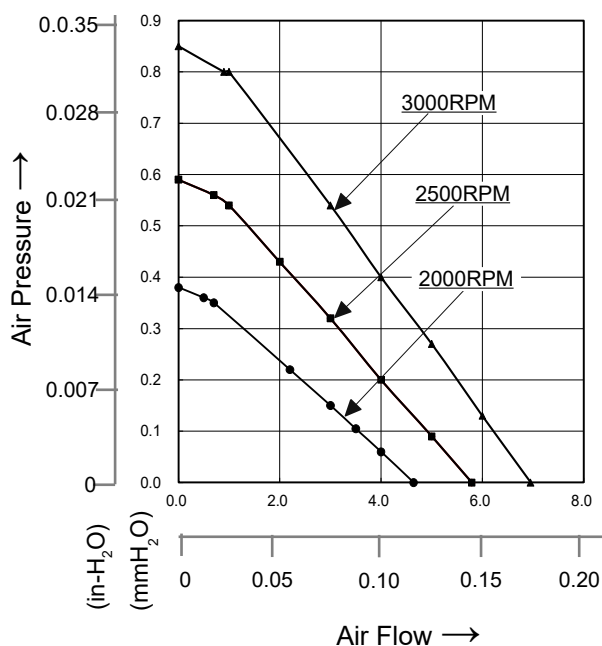

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC BRACKET FAN

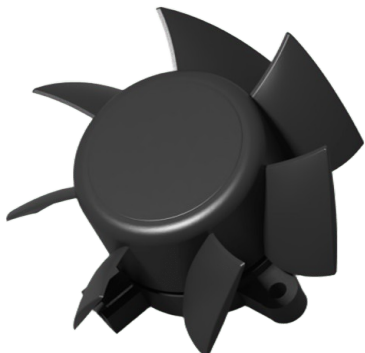



60x60x25mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 20.4g
- SAFETY : UL/CUL/CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSY0602505L_1A01	B / S	5	0.16	3000	0.434	15.36	5.72	0.225	26.5
JSY0602505M_1A01	B / S	5	0.34	4000	0.579	20.48	7.63	0.300	33.2
JSY0602505H_1A01	B / S	5	0.70	5000	0.724	25.60	9.53	0.375	38.4
JSY0602505U_1A01	B / S	5	1.22	6000	0.869	30.72	11.44	0.450	40.3
JSY0602512L_1A01	B / S	12	0.06	3000	0.434	15.36	5.72	0.225	26.5
JSY0602512M_1A01	B / S	12	0.14	4000	0.579	20.48	7.63	0.300	33.2
JSY0602512H_1A01	B / S	12	0.28	5000	0.724	25.60	9.53	0.375	38.4
JSY0602512U_1A01	B / S	12	0.48	6000	0.869	30.72	11.44	0.450	40.3
JSY0602524L_1A01	B / S	24	0.03	3000	0.434	15.36	5.72	0.225	26.5
JSY0602524M_1A01	B / S	24	0.06	4000	0.579	20.48	7.63	0.300	33.2
JSY0602524H_1A01	B / S	24	0.14	5000	0.724	25.60	9.53	0.375	38.4
JSY0602524U_1A01	B / S	24	0.25	6000	0.869	30.72	11.44	0.450	40.3

*Bearing system B:two ball bearing S:sleeve

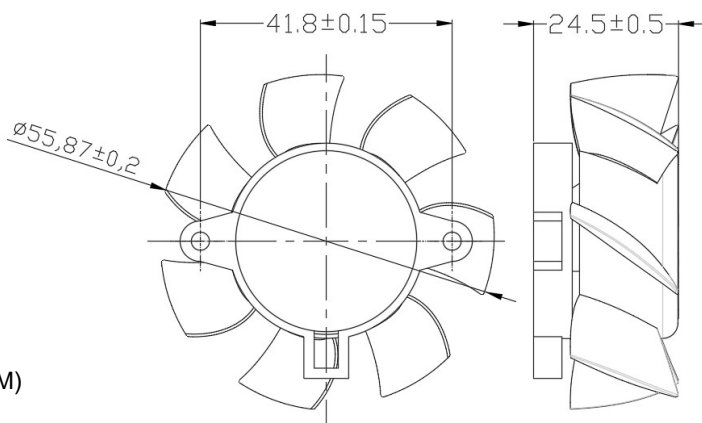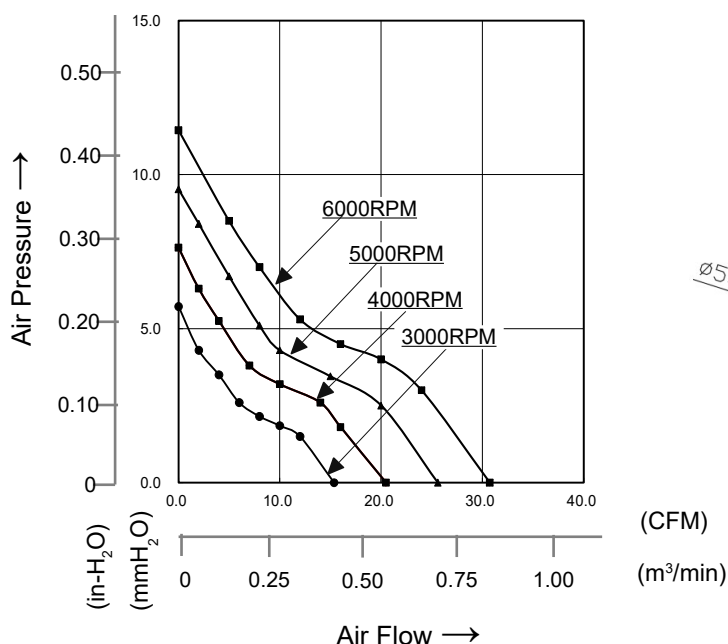

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC BRACKET FAN





70x70x10mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 32.0g
- SAFETY : UL/CUL/CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSY0701005L_1A01	B / S	5	0.21	2000	0.291	10.31	0.90	0.035	23.4
JSY0701005M_1A01	B / S	5	0.33	2500	0.416	14.71	1.55	0.061	27.2
JSY0701005H_1A01	B / S	5	0.40	3000	0.522	18.46	2.07	0.081	30.9
JSY0701012L_1A01	B / S	12	0.10	2000	0.291	10.31	0.90	0.035	23.4
JSY0701012M_1A01	B / S	12	0.14	2500	0.416	14.71	1.55	0.061	27.2
JSY0701012H_1A01	B / S	12	0.20	3000	0.522	18.46	2.07	0.081	30.9
JSY0701024L_1A01	B / S	24	0.05	2000	0.291	10.31	0.90	0.035	23.4
JSY0701024M_1A01	B / S	24	0.07	2500	0.416	14.71	1.55	0.061	27.2
JSY0701024H_1A01	B / S	24	0.10	3000	0.522	18.46	2.07	0.081	30.9

*Bearing system B:two ball bearing S:sleeve

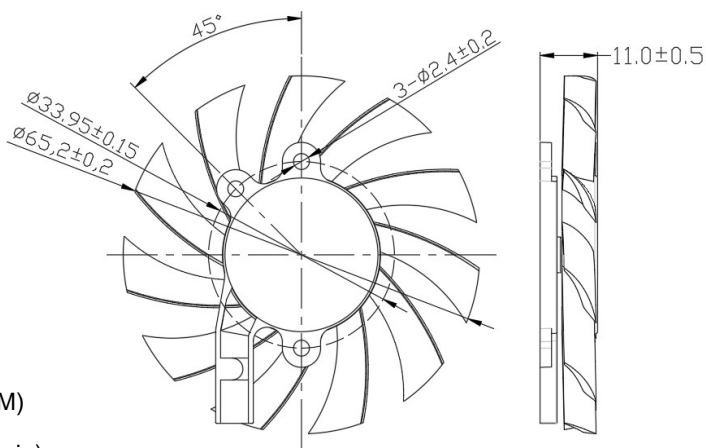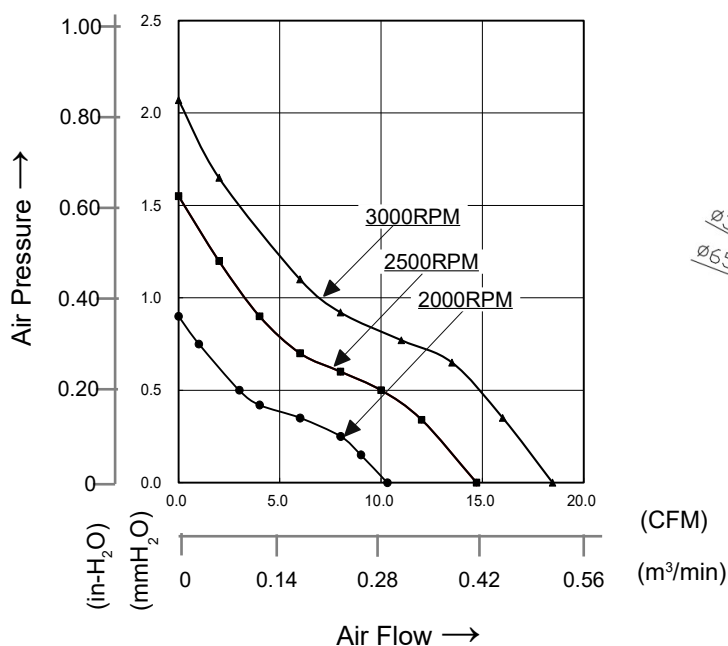

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC BRACKET FAN





70x70x15mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 46.8g
- SAFETY : UL/CUL/CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSY0701505L_1A01	B / S	5	0.20	2000	0.193	6.82	1.85	0.072	27.7
JSY0701505M_1A01	B / S	5	0.30	2500	0.241	8.53	2.88	0.113	32.5
JSY0701505H_1A01	B / S	5	0.50	3000	0.289	10.23	4.15	0.163	35.6
JSY0701512L_1A01	B / S	12	0.10	2000	0.193	6.82	1.85	0.072	27.7
JSY0701512M_1A01	B / S	12	0.15	2500	0.241	8.53	2.88	0.113	32.5
JSY0701512H_1A01	B / S	12	0.25	3000	0.289	10.23	4.15	0.163	35.6
JSY0701524L_1A01	B / S	24	0.04	2000	0.193	6.82	1.85	0.072	27.7
JSY0701524M_1A01	B / S	24	0.07	2500	0.241	8.53	2.88	0.113	32.5
JSY0701524H_1A01	B / S	24	0.12	3000	0.289	10.23	4.15	0.163	35.6

*Bearing system B:two ball bearing S:sleeve

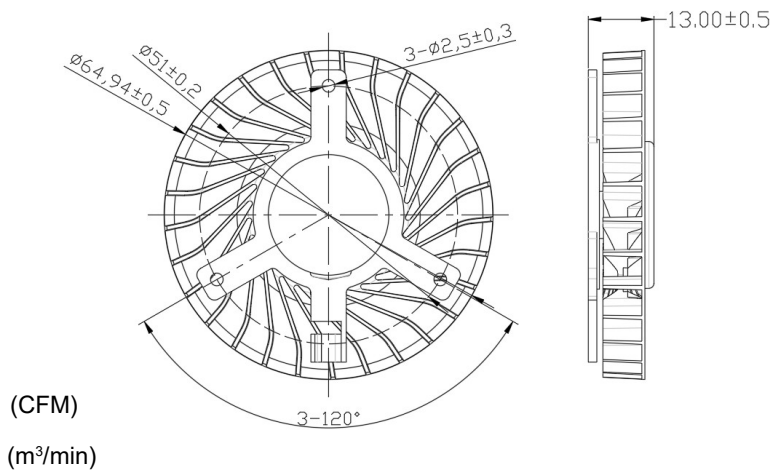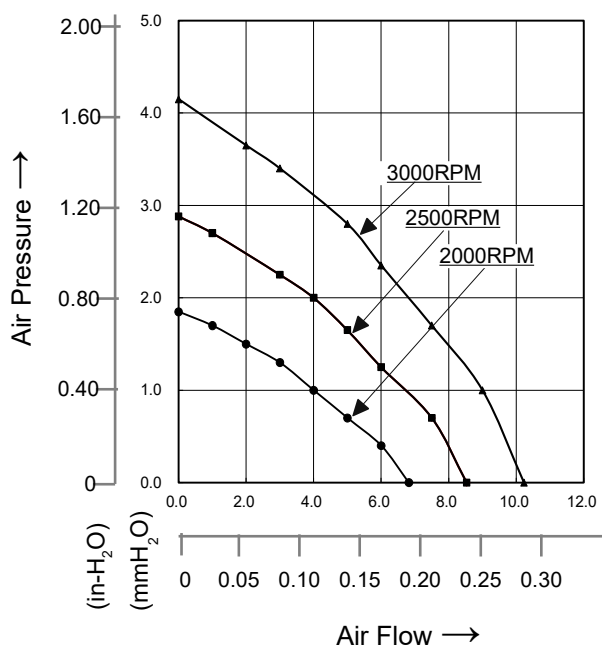

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC BRACKET FAN





75x75x32mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 92.0g
- SAFETY : UL/CUL/CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSY0753212L_1A01	B / S	12	0.76	3500	0.540	19.10	15.90	0.625	45.0
JSY0753212M_1A01	B / S	12	0.98	4500	0.694	24.54	20.45	0.805	49.0
JSY0753212H_1A01	B / S	12	1.20	5500	0.849	30.00	25.00	0.984	56.8
JSY0753224L_1A01	B / S	24	0.37	3500	0.540	19.10	15.90	0.625	45.0
JSY0753224M_1A01	B / S	24	0.47	4500	0.694	24.54	20.45	0.805	49.0
JSY0753224H_1A01	B / S	24	0.58	5500	0.849	30.00	25.00	0.984	56.8
JSY0753248L_1A01	B / S	48	0.19	3500	0.540	19.10	15.90	0.625	45.0
JSY0753248M_1A01	B / S	48	0.25	4500	0.694	24.54	20.45	0.805	49.0
JSY0753248H_1A01	B / S	48	0.30	5500	0.849	30.00	25.00	0.984	56.8


*Bearing system B:two ball bearing S:sleeve

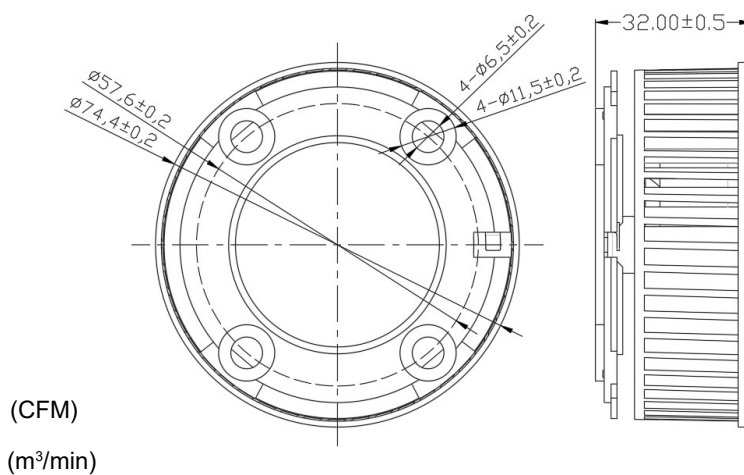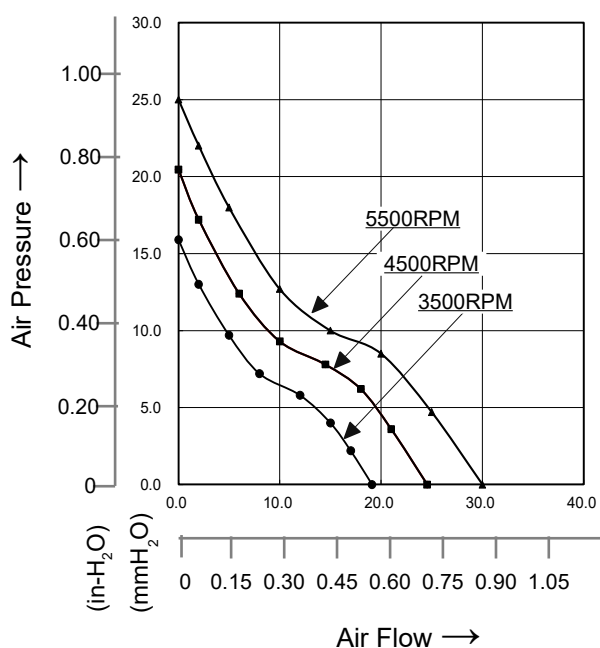

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC BRACKET FAN

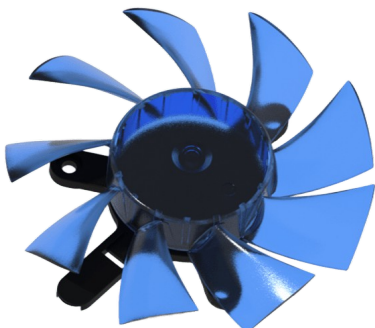



80x80x15mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PC(94V-2)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 46.8g
- SAFETY : UL/CUL/CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSY0801505L_1A01	B / S	5	0.09	1500	0.414	14.64	1.43	0.056	19.8
JSY0801505M_1A01	B / S	5	0.17	2000	0.552	19.53	1.91	0.075	24.6
JSY0801505H_1A01	B / S	5	0.32	2500	0.690	24.41	2.39	0.094	28.7
JSY0801505U_1A01	B / S	5	0.70	3200	0.884	31.24	3.05	0.120	32.1
JSY0801512L_1A01	B / S	12	0.04	1500	0.414	14.64	1.43	0.056	19.8
JSY0801512M_1A01	B / S	12	0.07	2000	0.552	19.53	1.91	0.075	24.6
JSY0801512H_1A01	B / S	12	0.13	2500	0.690	24.41	2.39	0.094	28.7
JSY0801512U_1A01	B / S	12	0.28	3200	0.884	31.24	3.05	0.120	32.1
JSY0801524L_1A01	B / S	24	0.02	1500	0.414	14.64	1.43	0.056	19.8
JSY0801524M_1A01	B / S	24	0.03	2000	0.552	19.53	1.91	0.075	24.6
JSY0801524H_1A01	B / S	24	0.06	2500	0.690	24.41	2.39	0.094	28.7
JSY0801524U_1A01	B / S	24	0.13	3200	0.884	31.24	3.05	0.120	32.1

*Bearing system B:two ball bearing S:sleeve

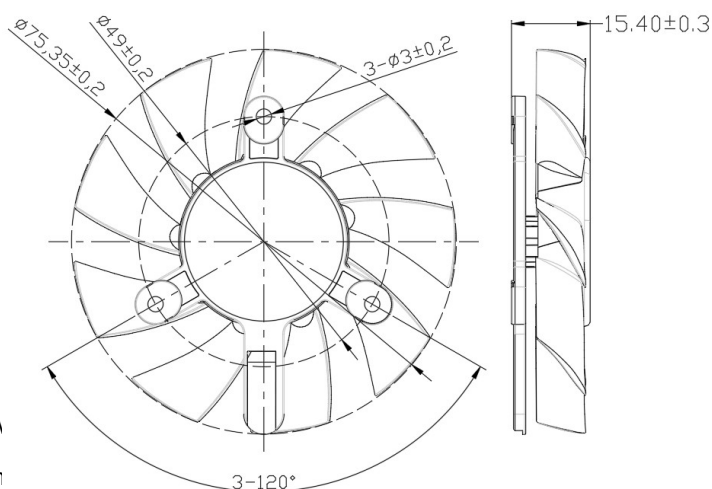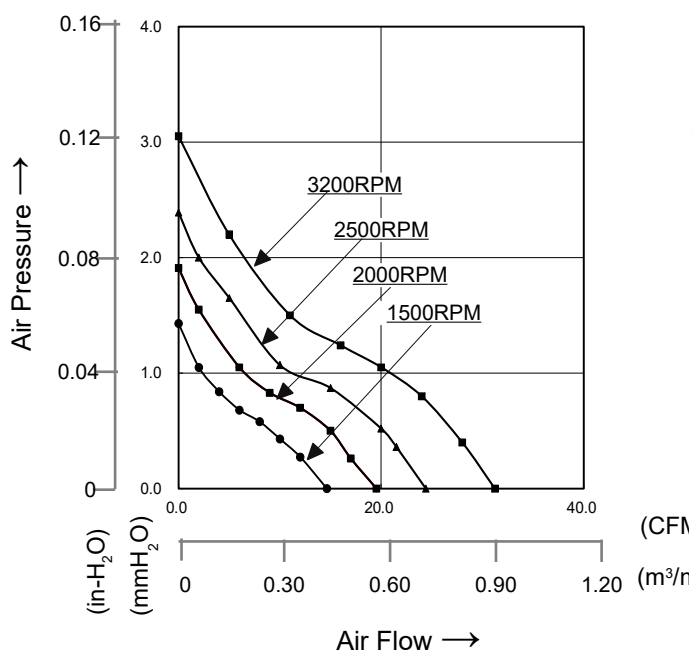

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC BRACKET FAN





80x80x25mm

- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 48.8g
- SAFETY : UL/CUL/CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSY0802505M_1A01	B / S	5	0.21	2500	0.830	29.35	4.72	0.185	28.3
JSY0802505H_1A01	B / S	5	0.35	3000	0.996	35.22	5.67	0.225	35.2
JSY0802505U_1A01	B / S	5	0.57	3500	1.162	41.09	6.61	0.260	37.6
JSY0802505V_1A01	B / S	5	0.92	4000	1.328	46.96	7.55	0.297	42.9
JSY0802505W_1A01	B / S	5	1.39	4500	1.495	52.83	8.50	0.334	49.1
JSY0802512M_1A01	B / S	12	0.08	2500	0.830	29.35	4.72	0.185	28.3
JSY0802512H_1A01	B / S	12	0.14	3000	0.996	35.22	5.67	0.225	35.2
JSY0802512U_1A01	B / S	12	0.23	3500	1.162	41.09	6.61	0.260	37.6
JSY0802512V_1A01	B / S	12	0.36	4000	1.328	46.96	7.55	0.297	42.9
JSY0802512W_1A01	B / S	12	0.55	4500	1.495	52.83	8.50	0.334	49.1
JSY0802524M_1A01	B / S	24	0.04	2500	0.830	29.35	4.72	0.185	28.3
JSY0802524H_1A01	B / S	24	0.07	3000	0.996	35.22	5.67	0.225	35.2
JSY0802524U_1A01	B / S	24	0.11	3500	1.162	41.09	6.61	0.260	37.6
JSY0802524V_1A01	B / S	24	0.17	4000	1.328	46.96	7.55	0.297	42.9
JSY0802524W_1A01	B / S	24	0.26	4500	1.495	52.83	8.50	0.334	49.1

*Bearing system B:two ball bearing S:sleeve

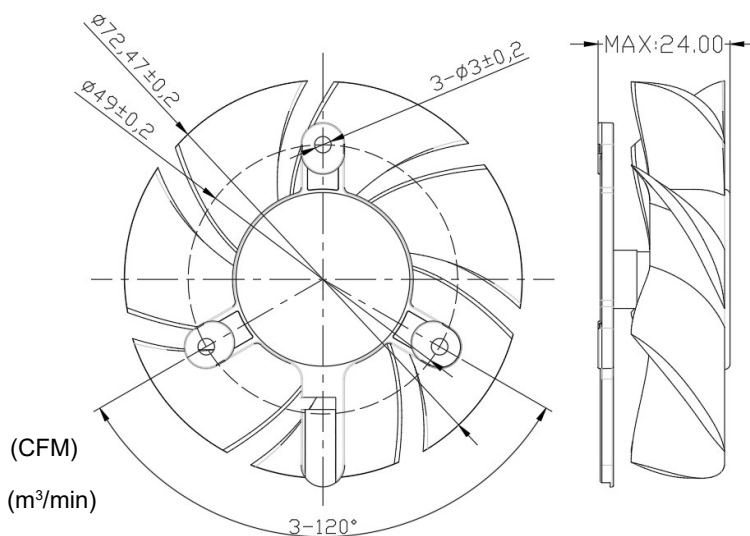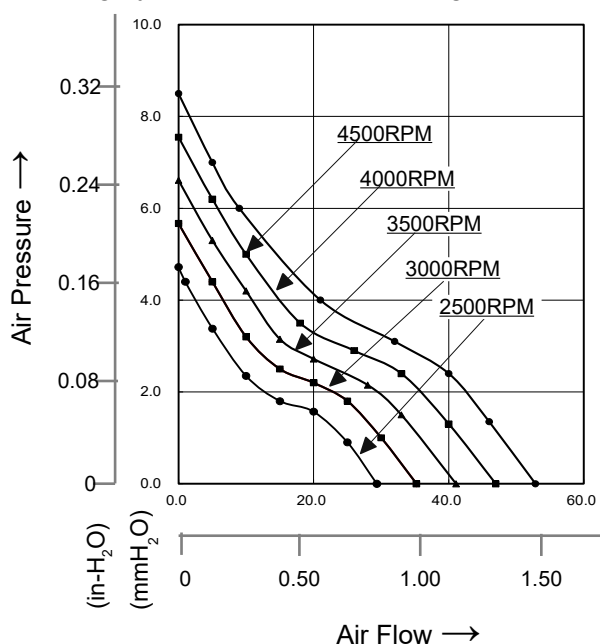

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.