

DC BLOWER FAN





133x133x92mm

- MOTOR : DC three phase brushless motor
- FRAME : SPCC ; IMPELLER : SPCC
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- WEIGHT : 1750g
- SAFETY : CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSB1339224HB1A01	B	24	4.5	2800	7.612	269.0	71.0	2.795	71.1
JSB1339248HB1A01	B	48	2.5	2800	7.612	269.0	71.0	2.795	71.1

*Bearing system B:two ball bearing

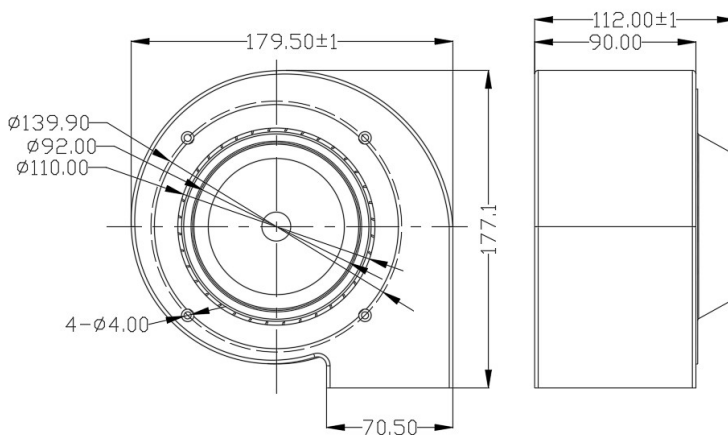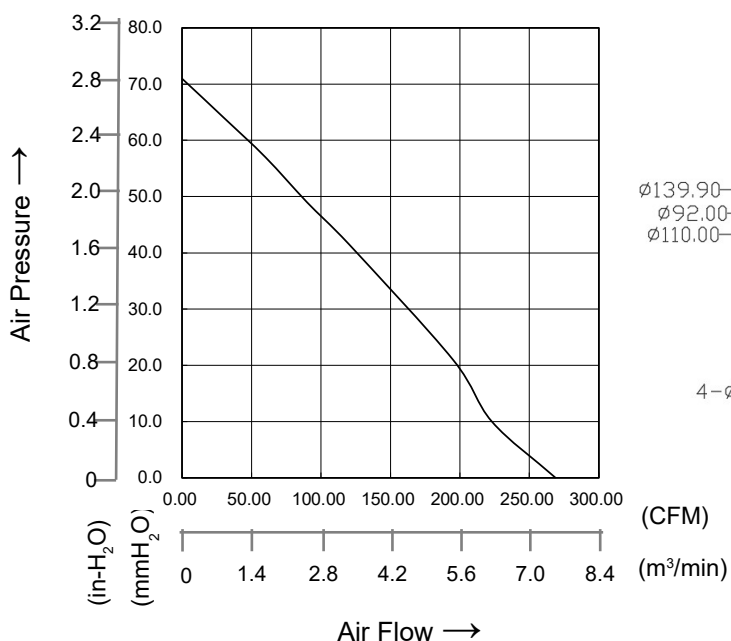

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC BLOWER FAN





150x150x92mm

- MOTOR : DC three phase brushless motor
- FRAME : SPCC ; IMPELLER : SPCC
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- WEIGHT : 2980g
- SAFETY : CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSB1509224HB1A01	B	24	6.1	2200	9.285	328.1	25.3	0.996	60.0
JSB1509248HB1A01	B	48	3.1	2200	9.285	328.1	25.3	0.996	60.0

*Bearing system B:two ball bearing

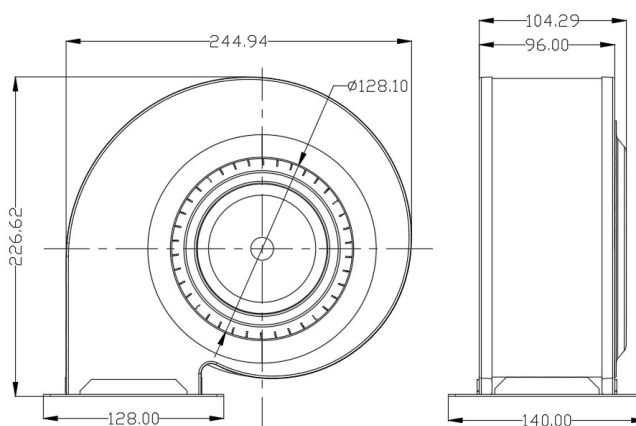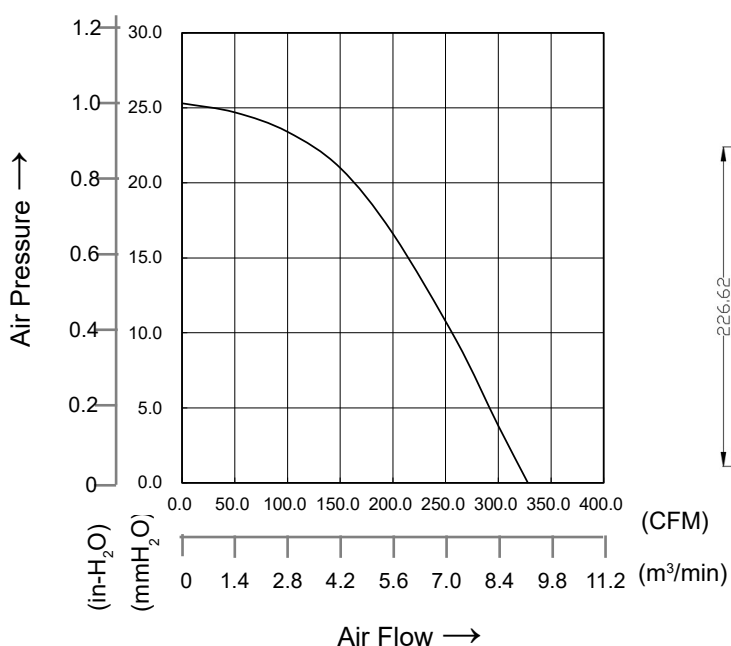

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC BLOWER FAN





180x180x92mm

- MOTOR : DC three phase brushless motor
- FRAME : SPCC ; IMPELLER : SPCC
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- WEIGHT : 3740g
- SAFETY : CE



JARO	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number	B	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSB1809224HB1A01	B	24	5.0	1600	12.514	442.2	22.4	0.881	68.0
JSB1809248HB1A01	B	48	2.5	1600	15.514	442.2	22.4	0.881	68.0

*Bearing system B: two ball bearing

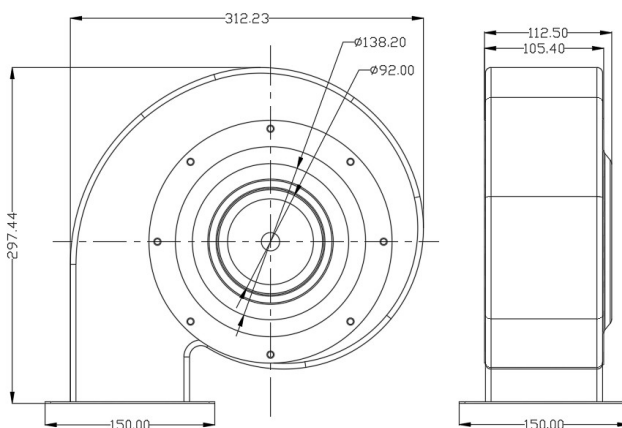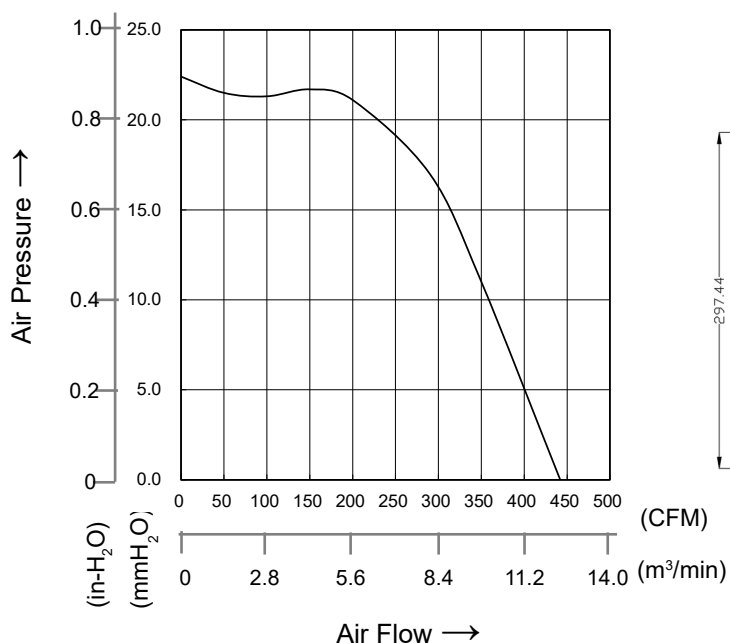

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.