

DC CENTRIFUGAL FAN





Φ133x80.5mm

- MOTOR : DC single phase brushless motor
- FRAME : Aluminum ; IMPELLER : Plastic(UL 94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- WEIGHT : 800g
- SAFETY : UL / CUL / CE



JARO	Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number		V	A	RPM	m ³ /h	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSD1338024HB1A01	B	24	5.0	4500	358.6	210.9	41.67	1.65	68
JSD1338048HB1A01	B	48	2.5	4500	358.6	210.9	41.67	1.65	68

*Bearing system B:two ball bearing

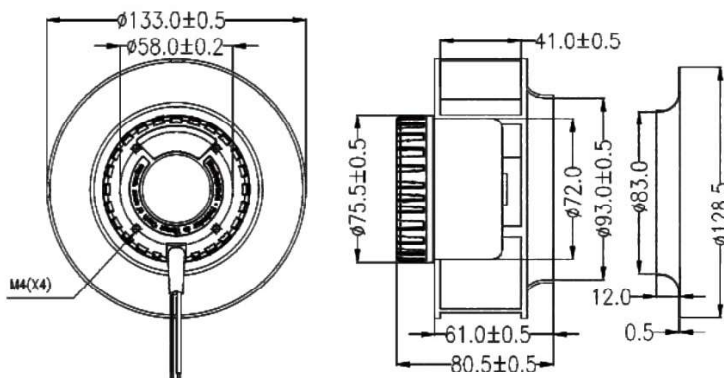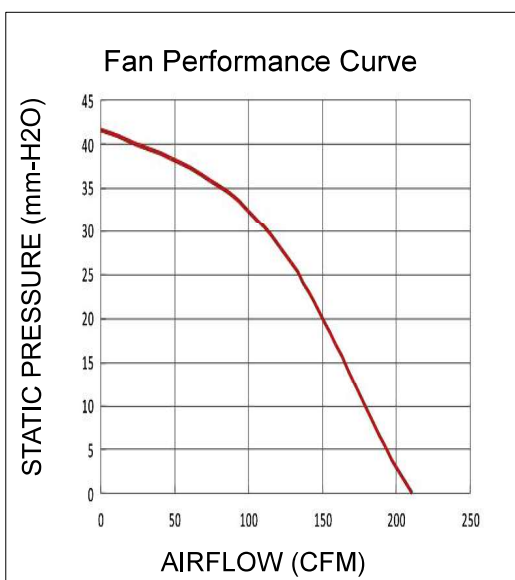

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC CENTRIFUGAL FAN






Φ175x69mm

- MOTOR : DC single phase brushless motor
- FRAME : Aluminum ; IMPELLER : Plastic(UL 94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- WEIGHT : 1300g
- SAFETY : UL / CUL / CE



JARO	Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number		V	A	RPM	m ³ /h	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSD1756924HBBA01	B	24	5.0	3500	578.6	345.7	45.7	1.8	72
JSD1756948HBBA01	B	48	2.5	3500	578.6	345.7	45.7	1.8	72

*Bearing system B:two ball bearing

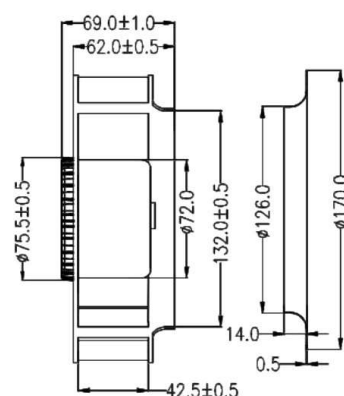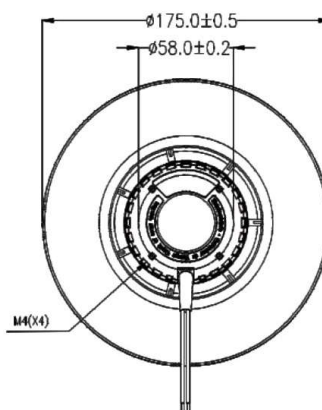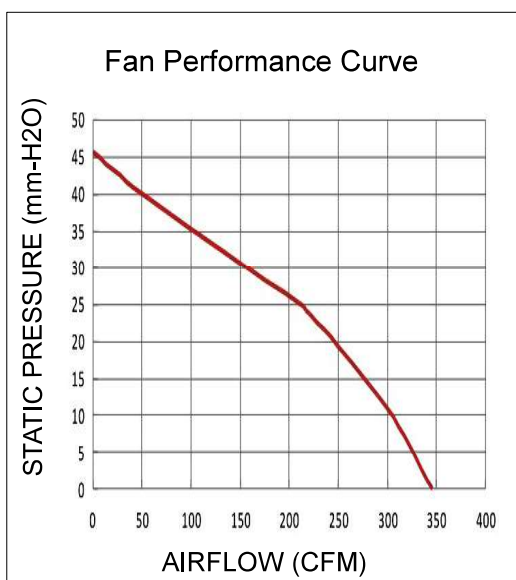

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC CENTRIFUGAL FAN





Φ190x67mm

- MOTOR : DC single phase brushless motor
- FRAME : Aluminum ; IMPELLER : Plastic(UL 94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- WEIGHT : 1300g
- SAFETY : UL / CUL / CE



JARO	Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number		V	A	RPM	m ³ /h	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSD1906724HBBA01	B	24	5.0	3000	608.9	358.2	46.6	1.9	71.4
JSD1906748HBBA01	B	48	2.5	3000	608.9	358.2	46.6	1.9	71.4

*Bearing system B:two ball bearing

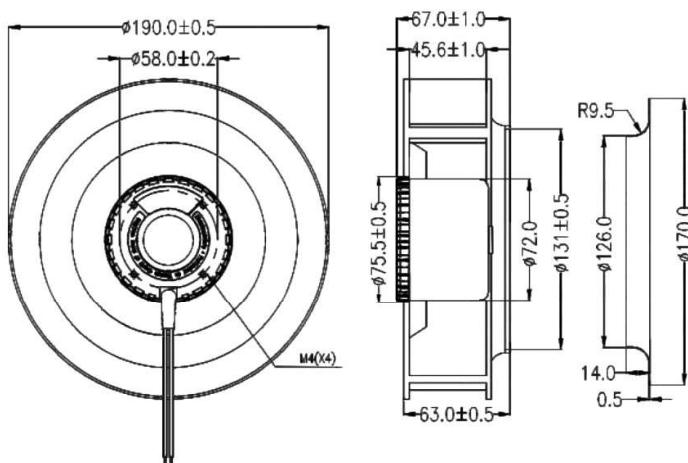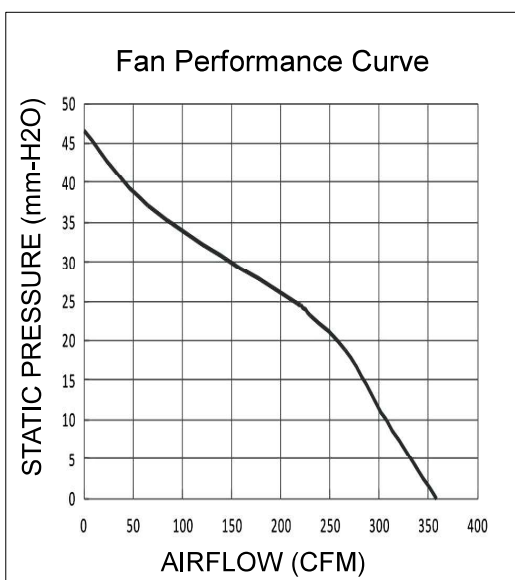

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC CENTRIFUGAL FAN





Φ220x76mm

- MOTOR : DC single phase brushless motor
- FRAME : Aluminum ; IMPELLER : Plastic(UL 94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- WEIGHT : 1450g
- SAFETY : UL / CUL / CE



JARO	Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number		V	A	RPM	m ³ /h	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSD2207624HBBA02	B	24	5.0	3100	1112.1	653.9	60.5	2.38	72
JSD2207648HBBA02	B	48	3.3	3100	1112.1	653.9	60.5	2.38	72

*Bearing system B:two ball bearing

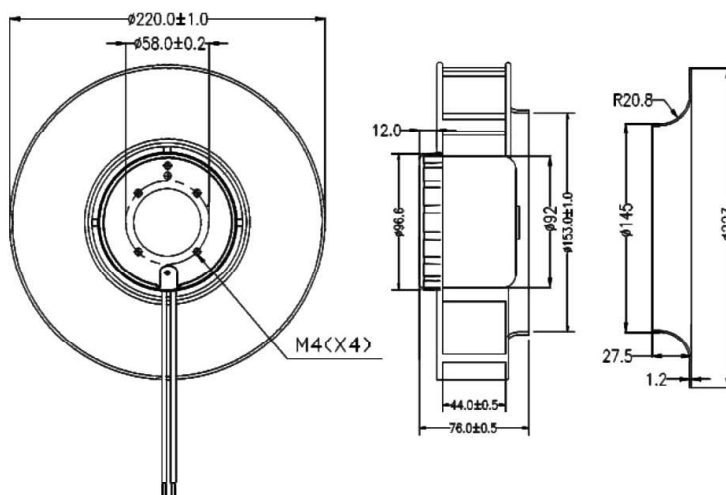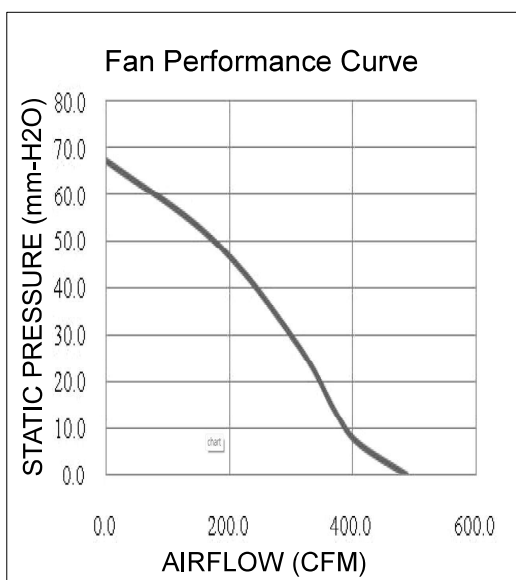

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC CENTRIFUGAL FAN





Φ225x99mm

- **MOTOR** : DC single phase brushless motor
- **FRAME** : Aluminum ; **IMPELLER** : Plastic(UL 94V-0)
- **OPERATING TEMP.**: -10°C~70°C
- **STORAGE TEMP.**: -40°C~75°C
- **WEIGHT** : 1500g
- **SAFETY** : UL / CUL / CE



JARO	Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number		V	A	RPM	m ³ /h	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSD2259924HBBA02	B	24	6.2	2800	1195.6	703.0	54.5	2.15	74.5
JSD2259948HBBA02	B	48	3.0	2800	1195.6	703.0	54.5	2.15	74.5

*Bearing system B:two ball bearing

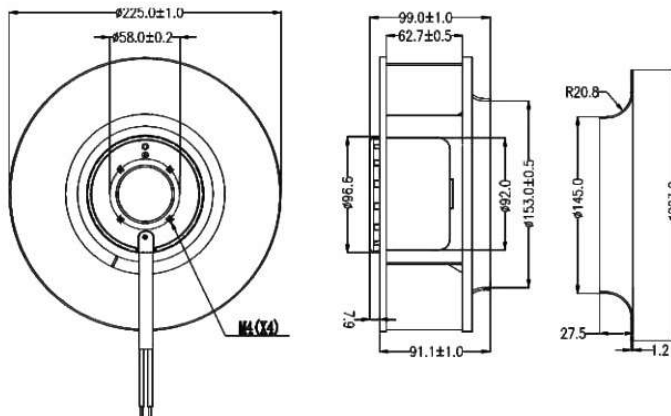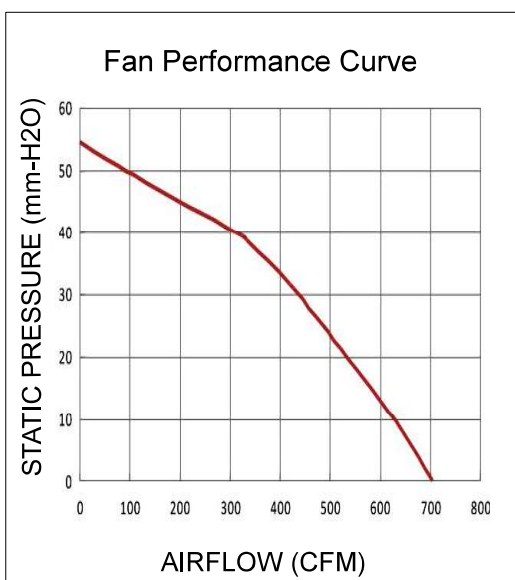

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC CENTRIFUGAL FAN





Φ250x92mm

- MOTOR : DC single phase brushless motor
- FRAME : Aluminum ; IMPELLER : Plastic(UL 94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- WEIGHT : 1500g
- SAFETY : UL / CUL / CE



JARO	Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number		V	A	RPM	m ³ /h	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSD2509224HBBA01	B	24	6.1	2800	1218.1	716.5	68.5	2.696	76
JSD2509248HBBA01	B	48	3.9	2800	1218.1	716.5	68.5	2.696	76

*Bearing system B:two ball bearing

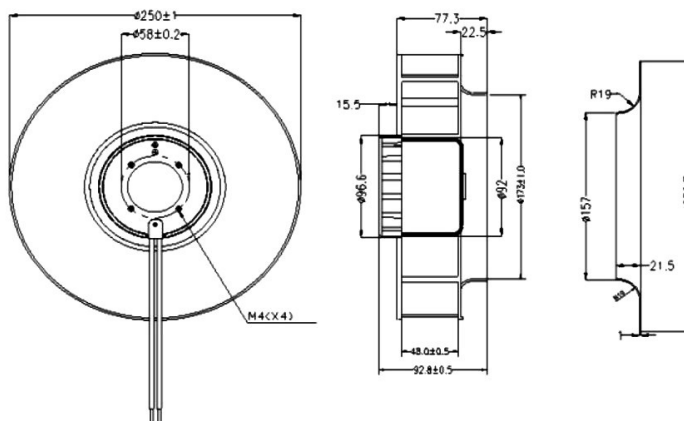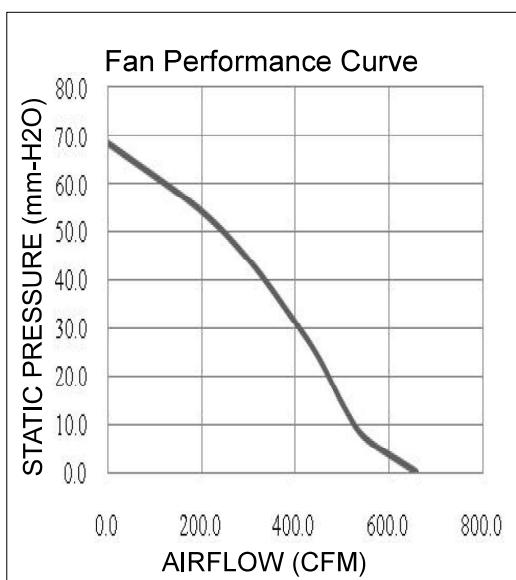

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC CENTRIFUGAL FAN





Φ280x99mm

- MOTOR : DC single phase brushless motor
- FRAME : Aluminum ; IMPELLER : SPCC
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- WEIGHT : 1600g
- SAFETY : UL / CUL / CE



JARO	Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number		V	A	RPM	m ³ /h	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSD2809924HBBA01	B	24	5.0	2200	1492.2	877.4	47.89	1.885	73
JSD2809948HBBA01	B	48	3.9	2200	1492.2	877.4	47.89	1.885	73

*Bearing system B:two ball bearing

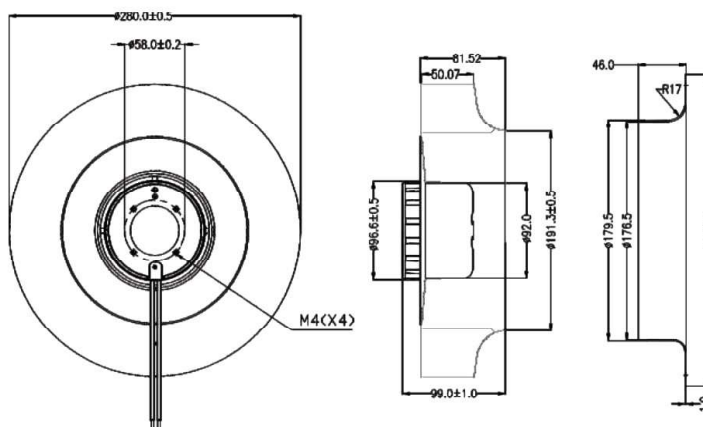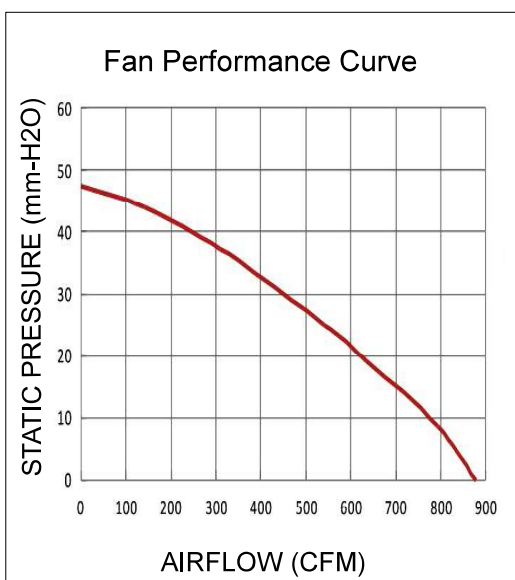

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC CENTRIFUGAL FAN





Φ315x161mm

- MOTOR : DC single phase brushless motor
- FRAME : Aluminum ; IMPELLER : Aluminum
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- WEIGHT : 3000g
- SAFETY : UL / CUL / CE



JARO	Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number		V	A	RPM	m ³ /h	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSD315G148LBBA01	B	48	8.8	2100	2847.94	1674.59	80.02	3.15	76.0

*Bearing system B:two ball bearing

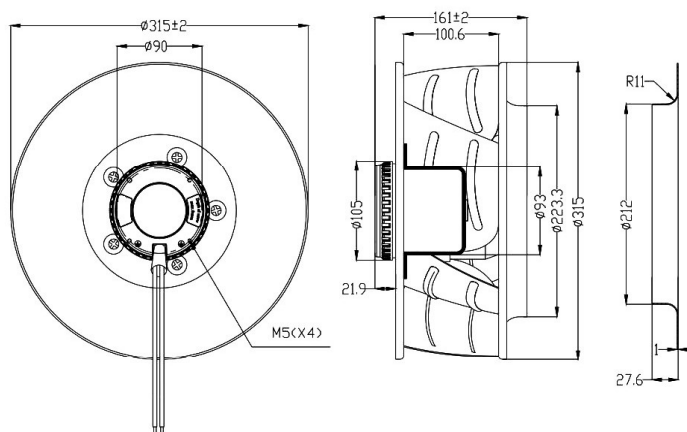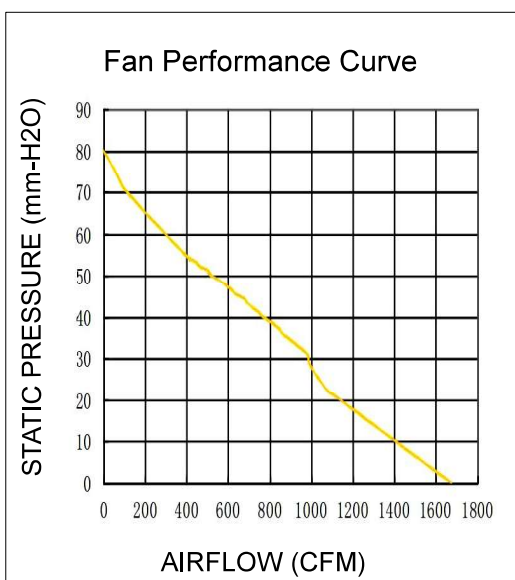

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC CENTRIFUGAL FAN





Φ355x167.4mm

- MOTOR : DC single phase brushless motor
- FRAME : Aluminum ; IMPELLER : Aluminum
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- WEIGHT : 4000g
- SAFETY : CE



JARO	Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number		V	A	RPM	m ³ /h	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSD355G748MBBA01	B	48	8.8	2000	2441.11	1435.37	104.9	4.129	70.0

*Bearing system B: two ball bearing

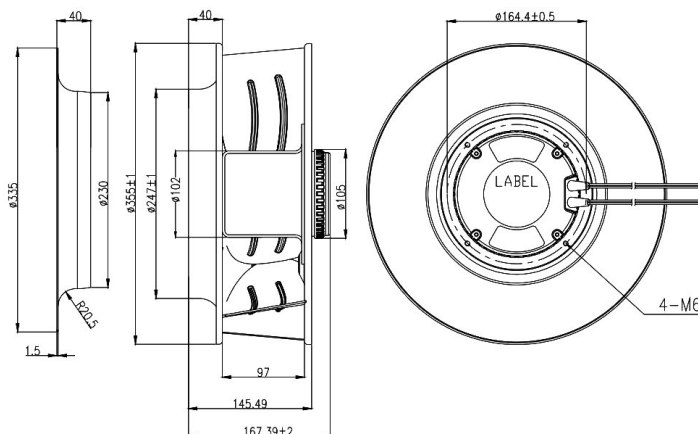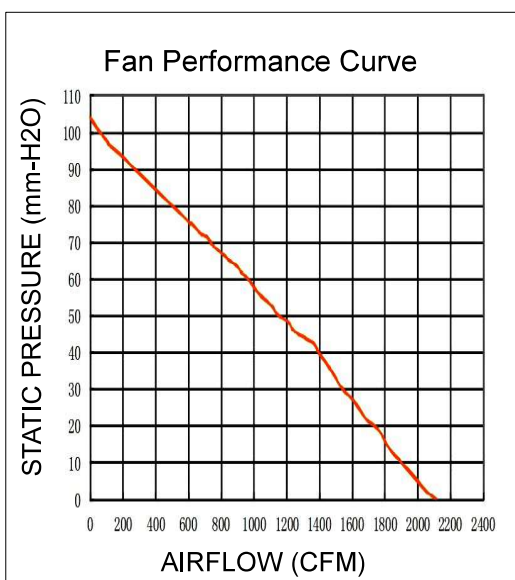

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

DC CENTRIFUGAL FAN





Φ403x167mm

- **MOTOR** : DC single phase brushless motor
- **FRAME** : Aluminum ; **IMPELLER** : Aluminum
- **OPERATING TEMP.**: -10°C~70°C
- **STORAGE TEMP.**: -40°C~75°C
- **WEIGHT** : 4500g
- **SAFETY** : UL / CUL / CE



JARO	Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
Part Number		V	A	RPM	m ³ /h	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSD403G748HBBA01	BALL	48	8.5	1500	2869.1	1687.0	83.00	3.24	65.88

*Bearing system B:two ball bearing

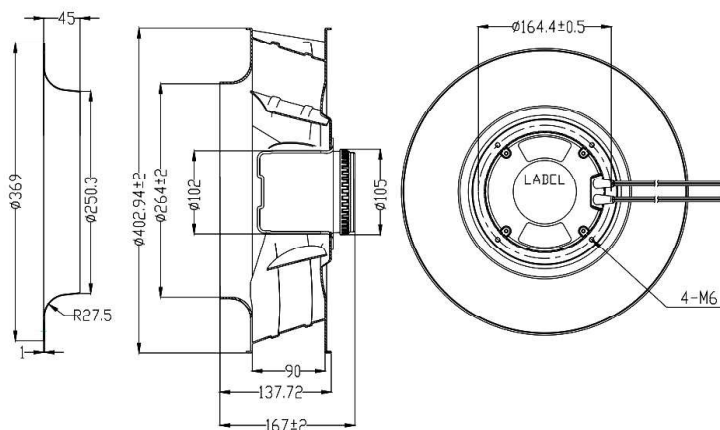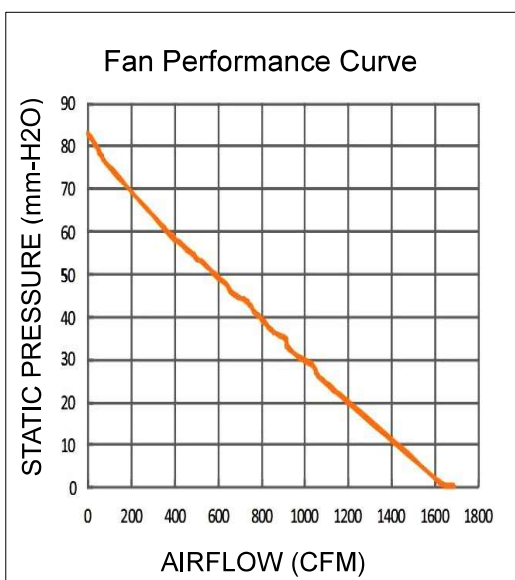

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.