

EC FAN





80x80x25mm

- FRAME : PBT (94V-0); IMPELLER : PBT (94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- CUSTOM WIRE AND CONNECTORS AVAILABLE
- WEIGHT : 78g
- SAFETY : CE



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
Part Number						Air Flow		Static Pressure		Level
						m³/min	CFM	mm-H₂O	In-H₂O	dBA
JSE0802511M_02	B / S	110	50/60	4.0	3000	1.137	40.2	4.57	0.179	38.5
JSE0802522M_02	B / S	220	50/60	4.0	3000	1.137	40.2	4.57	0.179	38.5

*Bearing system B:Two Ball Bearing S:Sleeve Bearing

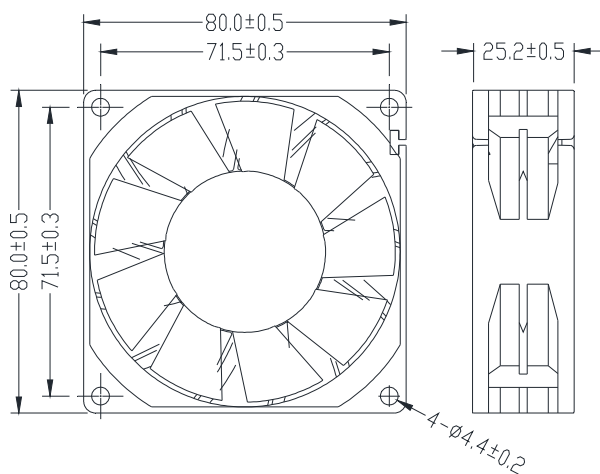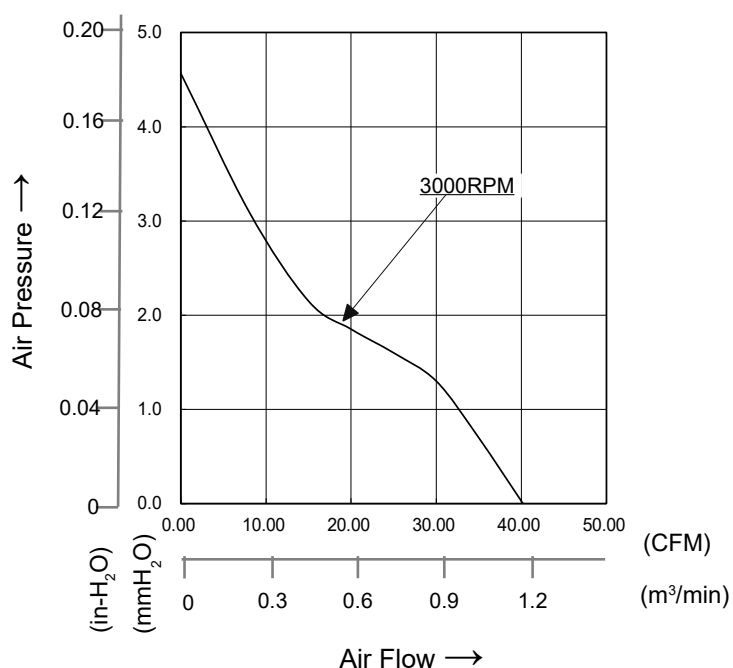

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





80x80x38mm

- FRAME : PBT (94V-0); IMPELLER : PBT (94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- CUSTOM WIRE AND CONNECTORS AVAILABLE
- WEIGHT :177.6g
- SAFETY : CE



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE0803811H_01	B / S	110	50/60	9.0	5000	1.763	62.3	13.6	0.535	52.1
JSE0803822H_01	B / S	220	50/60	9.0	5000	1.763	62.3	13.6	0.535	52.1

*Bearing system B:Two Ball Bearing S:Sleeve Bearing

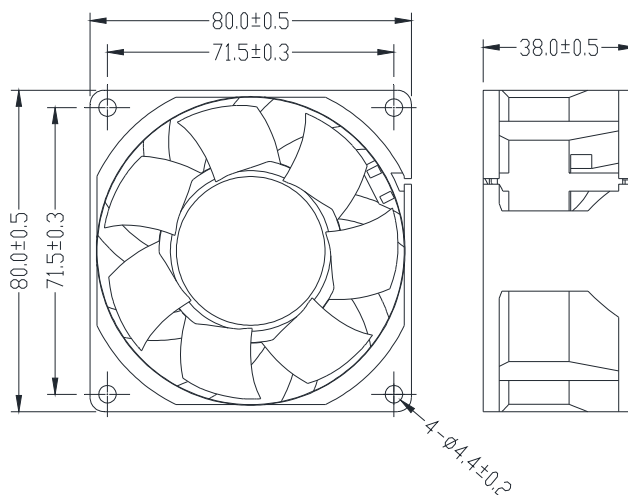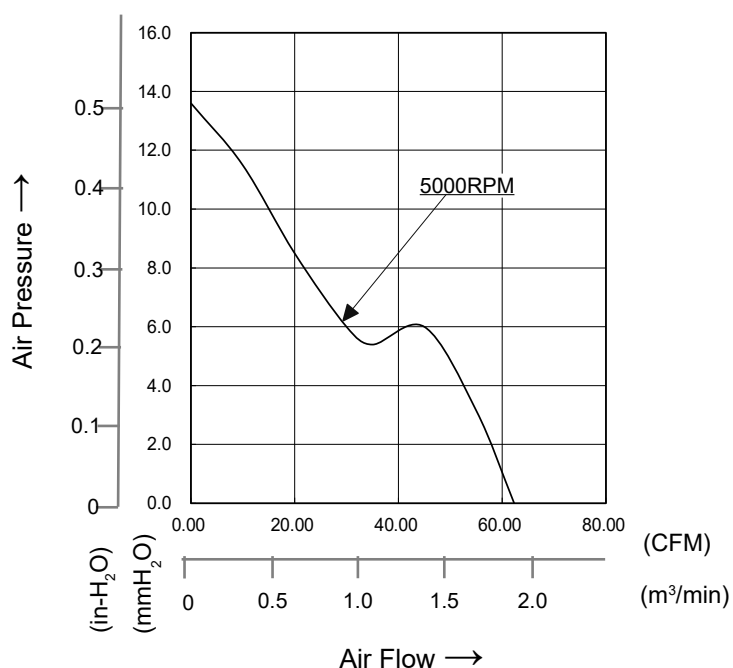

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





92x92x25mm

- FRAME : PBT (94V-0); IMPELLER : PBT (94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- CUSTOM WIRE AND CONNECTORS AVAILABLE
- WEIGHT : 102g
- SAFETY : CE



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE0922511M_02	B / S	110	50/60	4.5	2600	1.584	56.0	4.05	0.159	35.0
JSE0922522M_02	B / S	220	50/60	4.5	2600	1.584	56.0	4.05	0.159	35.0

*Bearing system B:Two Ball Bearing S:Sleeve Bearing

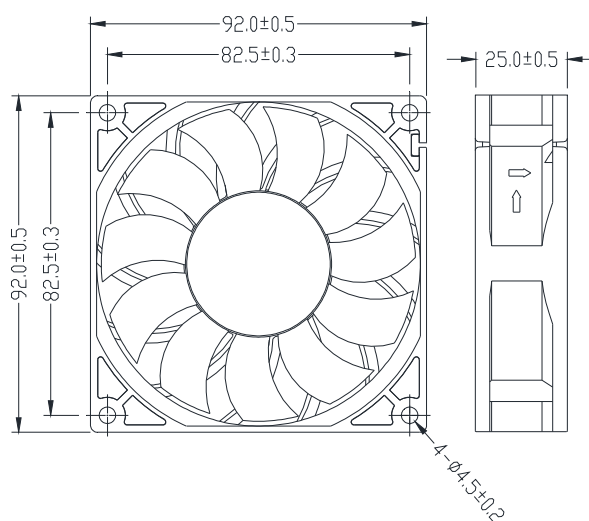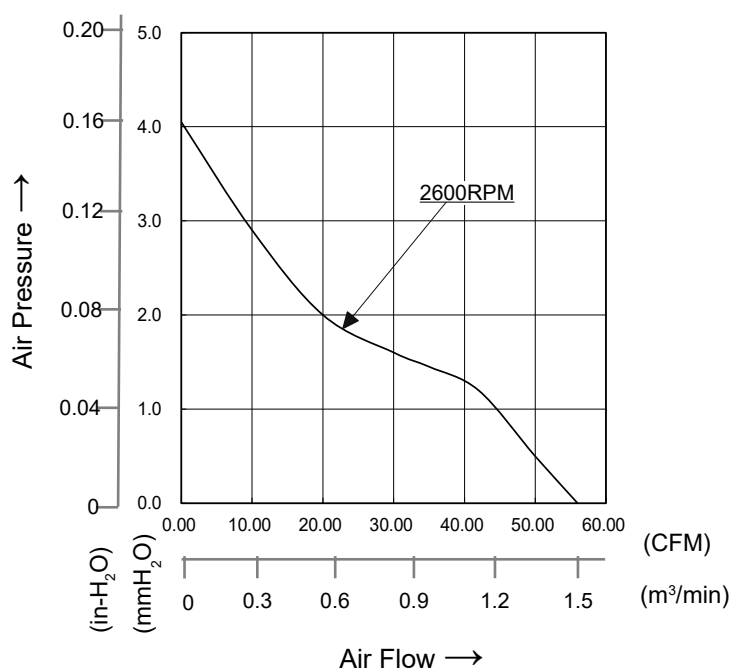

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





92x92x32mm

- FRAME : PBT (94V-0); IMPELLER : PBT (94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- CUSTOM WIRE AND CONNECTORS AVAILABLE
- WEIGHT :195g
- SAFETY : CE



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE0923211H_01	B / S	110	50/60	6.0	3500	1.603	56.66	4.24	0.166	43.7
JSE0923222H_01	B / S	220	50/60	6.0	3500	1.603	56.66	4.24	0.166	43.7

*Bearing system B:Two Ball Bearing S:Sleeve Bearing

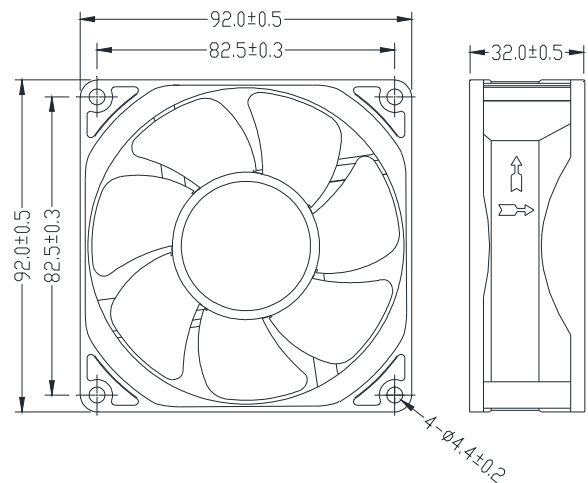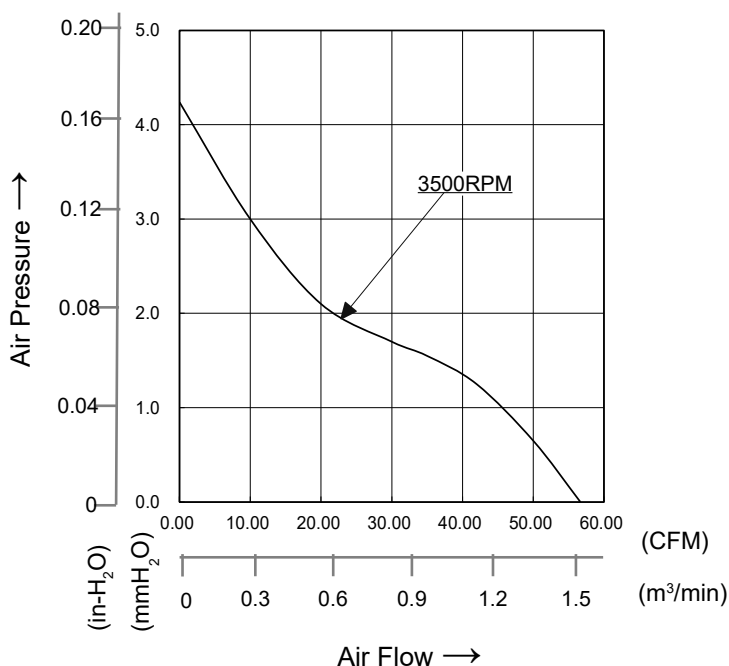

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





92x92x38mm

- FRAME : PBT (94V-0); IMPELLER : PBT (94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- CUSTOM WIRE AND CONNECTORS AVAILABLE
- WEIGHT :202g
- SAFETY : CE



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE0923811H_01	B / S	110	50/60	11.0	4500	2.444	86.38	12.76	0.502	56.0
JSE0923822H_01	B / S	220	50/60	11.0	4500	2.444	86.38	12.76	0.502	56.0

*Bearing system B:Two Ball Bearing S:Sleeve Bearing

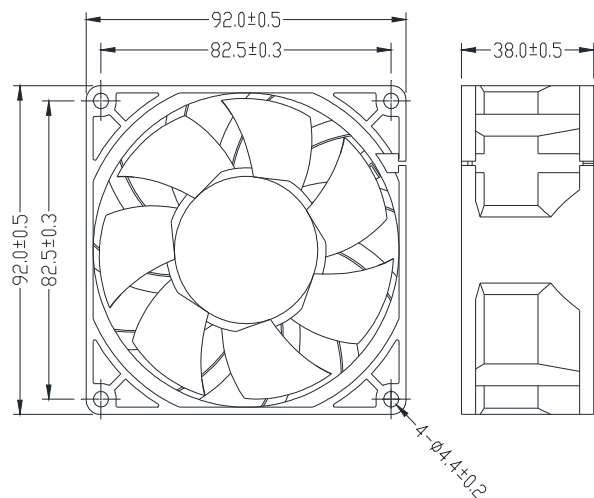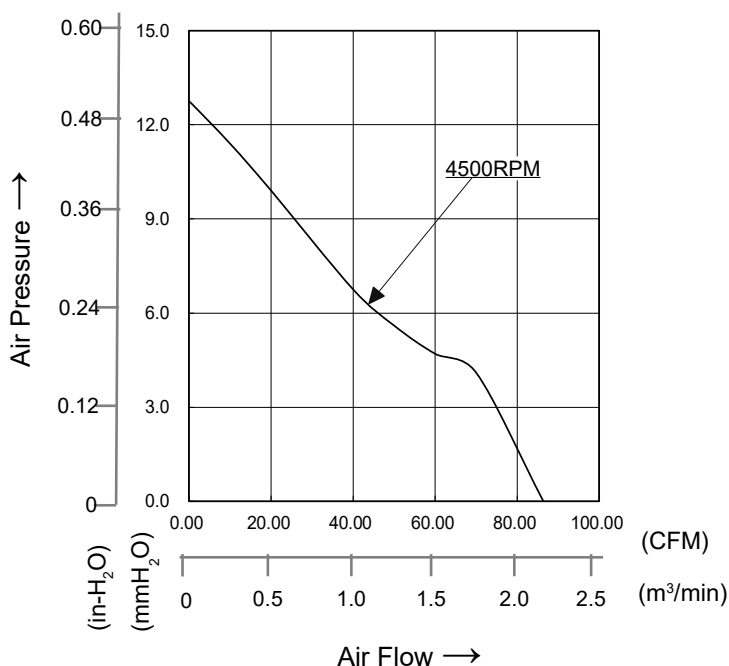

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





120x120x25mm

- FRAME : PBT (94V-0); IMPELLER : PBT (94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- CUSTOM WIRE AND CONNECTORS AVAILABLE
- WEIGHT :172g
- SAFETY : CE



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE1202511M_03	B / S	110	50/60	4.5	3000	2.648	93.6	8.0	0.314	49.0
JSE1202522M_03	B / S	220	50/60	4.5	3000	2.648	93.6	8.0	0.314	49.0

*Bearing system B:Two Ball Bearing S:Sleeve Bearing

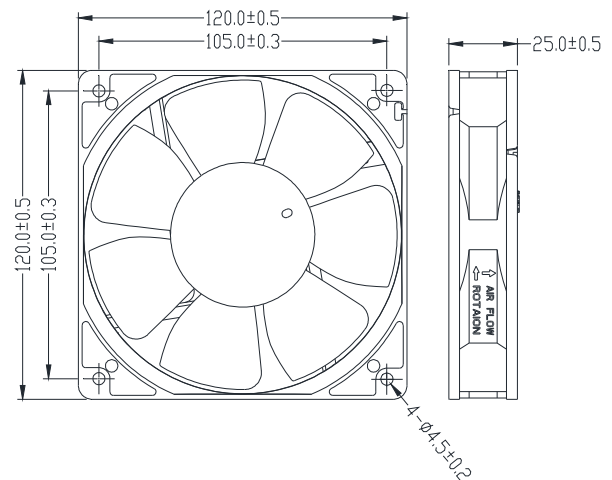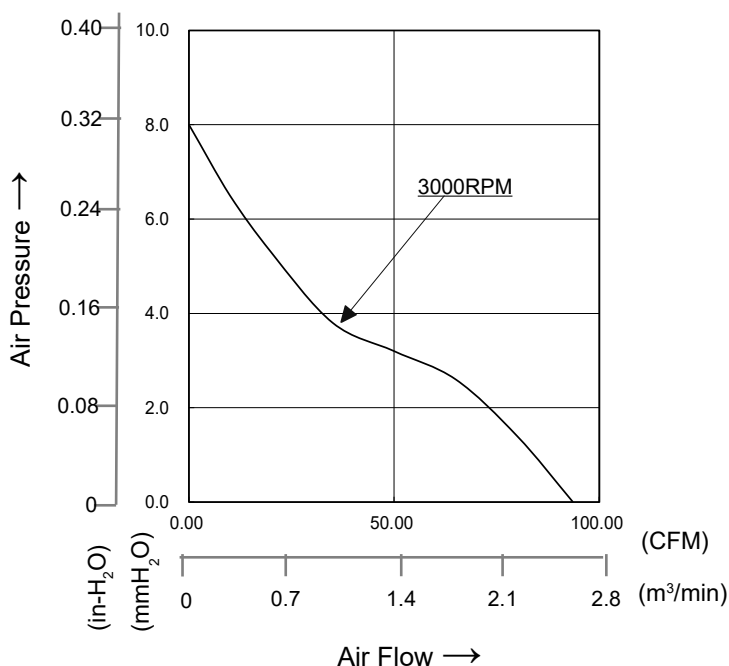

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





120x120x38mm

- FRAME : PBT (94V-0); IMPELLER : PBT (94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- CUSTOM WIRE AND CONNECTORS AVAILABLE
- WEIGHT :301.5g
- SAFETY : CE



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE1203811H_01	B / S	110	50/60	15.0	3500	3.787	133.82	13.10	0.515	52.4
JSE1203822H_01	B / S	220	50/60	15.0	3500	3.787	133.82	13.10	0.515	52.4

*Bearing system B:Two Ball Bearing S:Sleeve Bearing

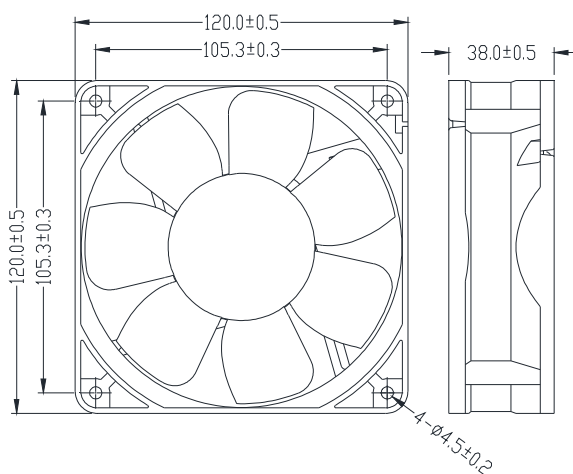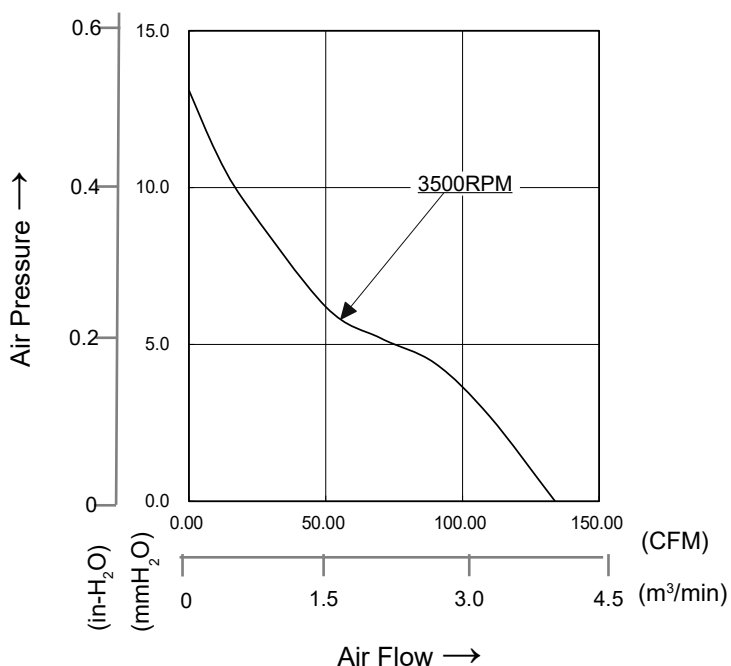

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





120x120x38mm

- FRAME : PBT (94V-0); IMPELLER : PBT (94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- CUSTOM WIRE AND CONNECTORS AVAILABLE
- WEIGHT :294.5g
- SAFETY : CE



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE1203811H_03	B / S	110	50/60	30.0	4500	5.917	209.1	25.50	1.003	64.7
JSE1203822H_03	B / S	220	50/60	30.0	4500	5.917	209.1	25.50	1.003	64.7

*Bearing system B:Two Ball Bearing S:Sleeve Bearing

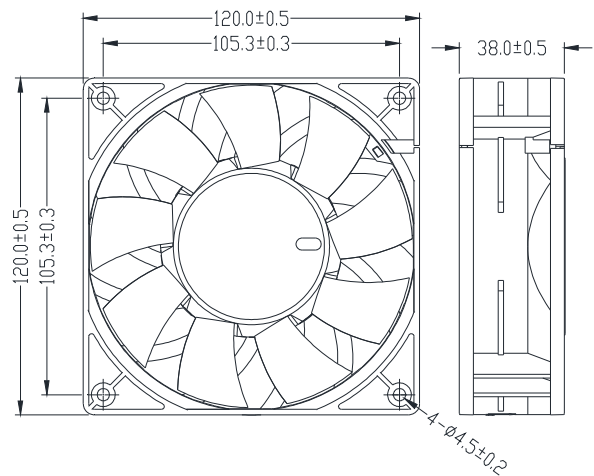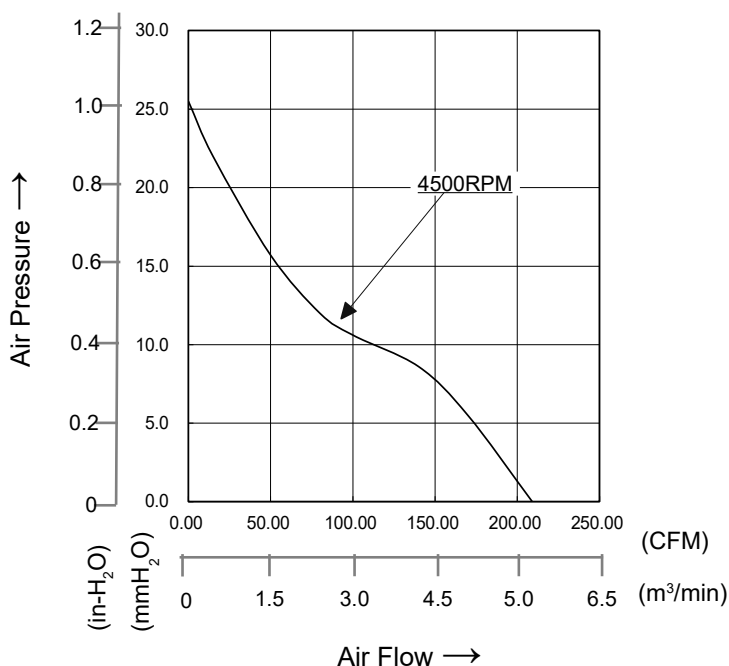

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





140x140x25mm

- FRAME : PBT (94V-0); IMPELLER : PBT (94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- CUSTOM WIRE AND CONNECTORS AVAILABLE
- WEIGHT :166.8g
- SAFETY : CE



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE1402511L_01	B / S	110	50/60	4.0	1800	2.153	76.1	1.70	0.066	38.8
JSE1402522L_01	B / S	220	50/60	4.0	1800	2.153	76.1	1.70	0.066	38.8

*Bearing system B:Two Ball Bearing S:Sleeve Bearing

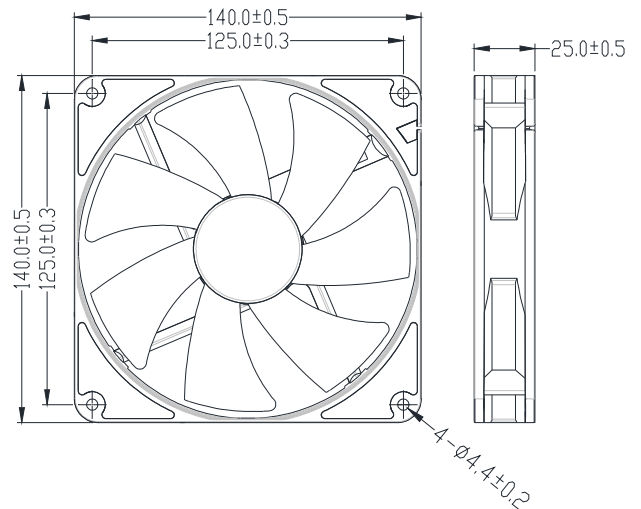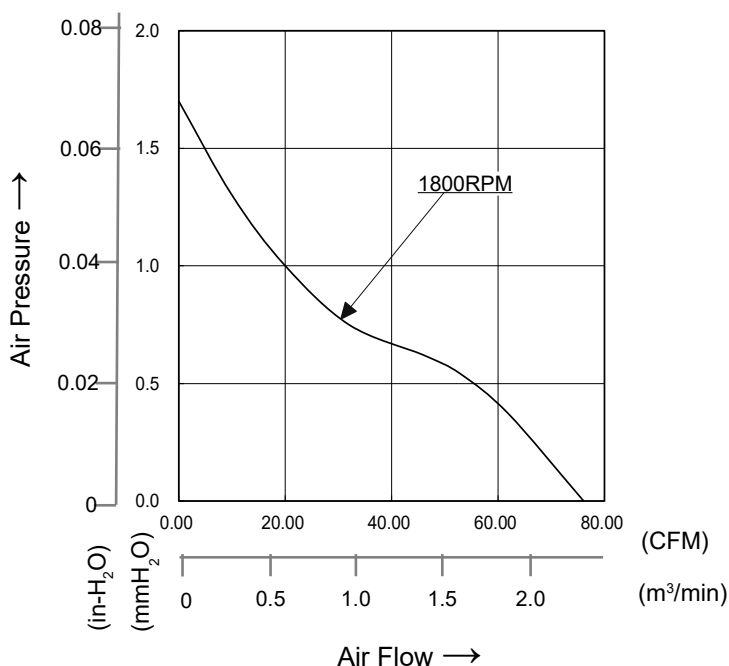

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





171x153x51mm

- **FRAME : ALUMINUM; IMPELLER : PBT (94V-0)**
- **OPERATING TEMP.: -10°C~70°C**
- **STORAGE TEMP.: -40°C~75°C**
- **CUSTOM WIRE AND CONNECTORS AVAILABLE**
- **WEIGHT :655g**
- **SAFETY : CE**



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE1725111HB02	B	110	50/60	64.0	5000	10.523	371.86	38.17	1.502	69.0
JSE1725122HB02	B	220	50/60	55.0	5000	10.523	371.86	38.17	1.502	69.0

*Bearing system B:Two Ball Bearing

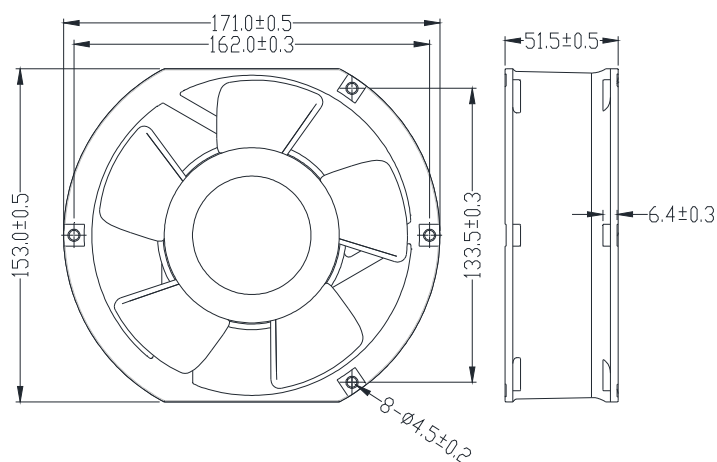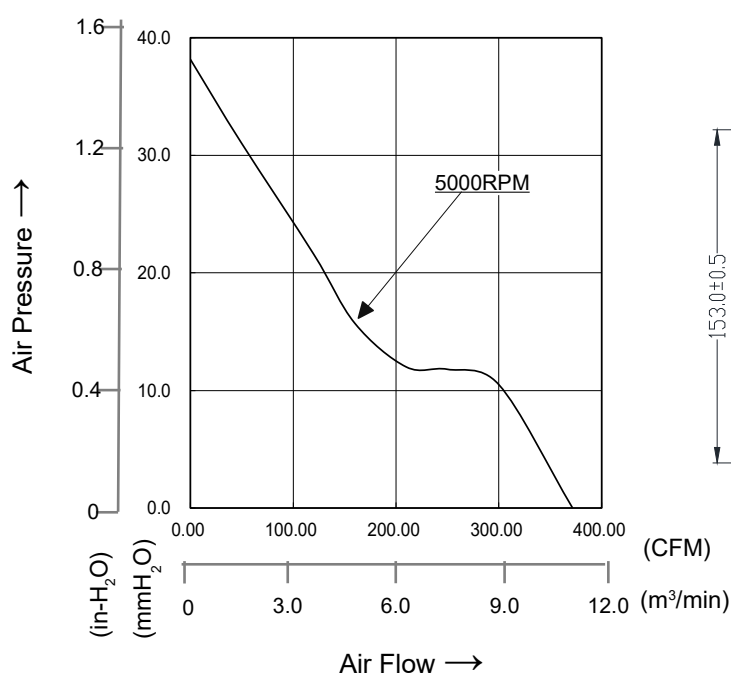

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





200x200x60mm

- **FRAME : ALUMINUM; IMPELLER : PBT (94V-0)**
- **OPERATING TEMP.: -10°C~70°C**
- **STORAGE TEMP.: -40°C~75°C**
- **CUSTOM WIRE AND CONNECTORS AVAILABLE**
- **WEIGHT :2800g**
- **SAFETY : CE**



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE2006011LB01	B	110	50/60	40.0	2000	9.169	324.0	10.62	0.418	58.6
JSE2006022LB01	B	220	50/60	40.0	2000	9.169	324.0	10.62	0.418	58.6
JSE2006011MB01	B	110	50/60	50.0	2500	11.544	407.92	16.61	0.653	62.4
JSE2006022MB01	B	220	50/60	50.0	2500	11.544	407.92	16.61	0.653	62.4
JSE2006011HB01	B	110	50/60	70.0	3000	13.935	492.43	22.69	0.893	68.5
JSE2006022HB01	B	220	50/60	70.0	3000	13.935	492.43	22.69	0.893	68.5

*Bearing system B:Two Ball Bearing

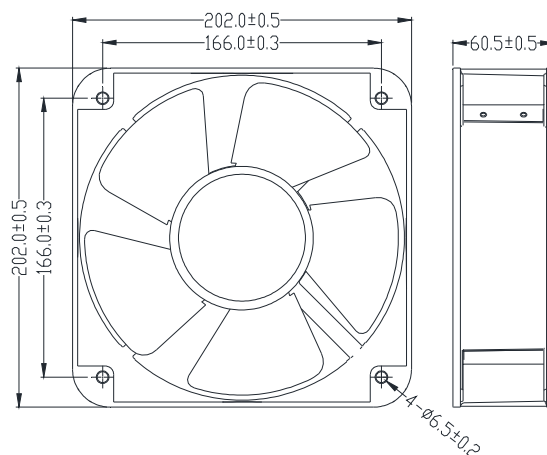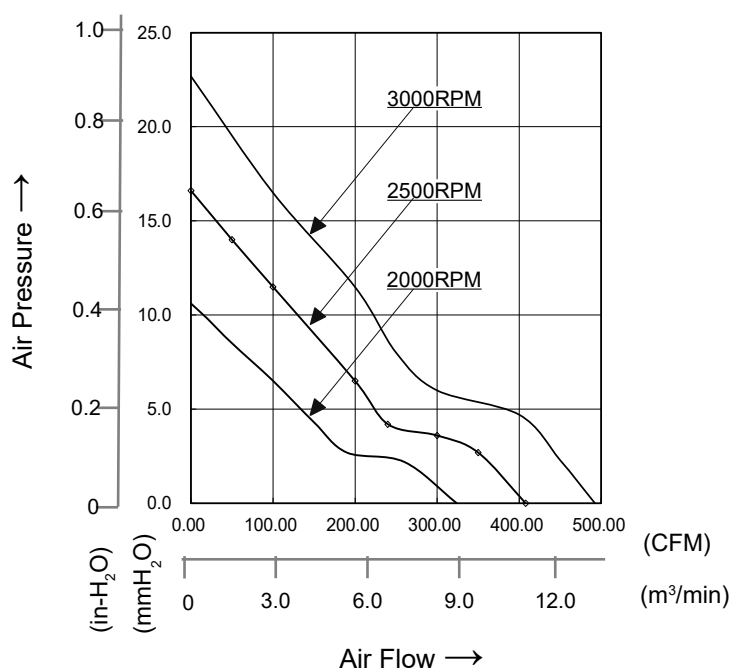

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





206x206x72mm

- **FRAME : ALUMINUM; IMPELLER : PBT (94V-0)**
- **OPERATING TEMP.: -10°C~70°C**
- **STORAGE TEMP.: -40°C~75°C**
- **CUSTOM WIRE AND CONNECTORS AVAILABLE**
- **WEIGHT :2800g**
- **SAFETY : CE**



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE2067211HB01	B	110	50/60	60.0	3000	16.499	583.01	28.11	1.106	65.5
JSE2067222HB01	B	220	50/60	60.0	3000	16.499	583.01	28.11	1.106	65.5

*Bearing system B:Two Ball Bearing

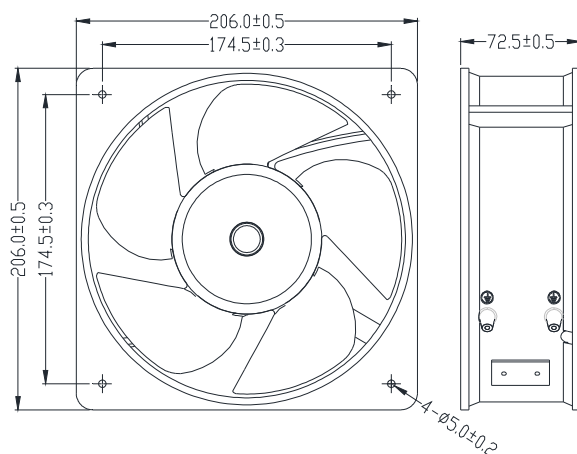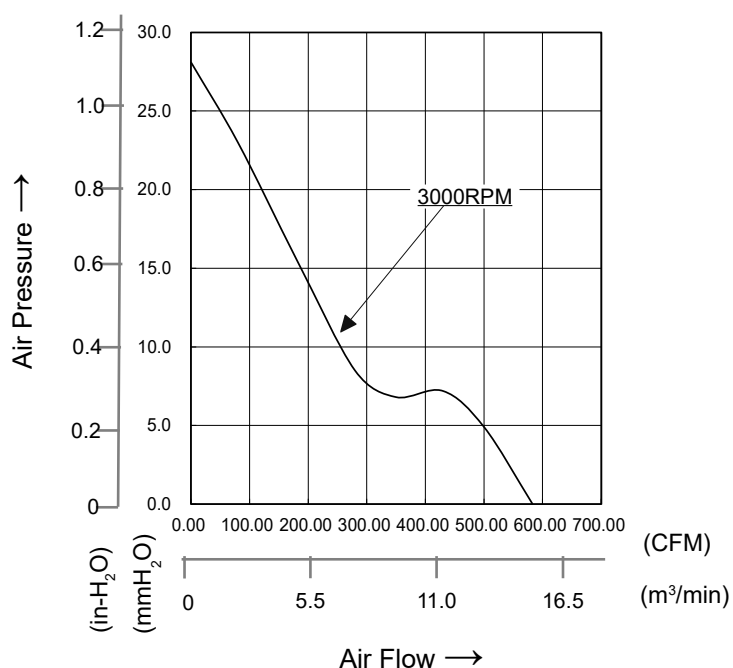

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





Ø254x89mm

- **FRAME : ALUMINUM; IMPELLER : PBT (94V-0)**
- **OPERATING TEMP.: -10°C~70°C**
- **STORAGE TEMP.: -40°C~75°C**
- **CUSTOM WIRE AND CONNECTORS AVAILABLE**
- **WEIGHT :2600g**
- **SAFETY : CE**



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE2548911HB01	B	110	50/60	60.0	2500	20.920	739.23	21.66	0.852	65.4
JSE2548922HB01	B	220	50/60	60.0	2500	20.920	739.23	21.66	0.852	65.4

*Bearing system B:Two Ball Bearing

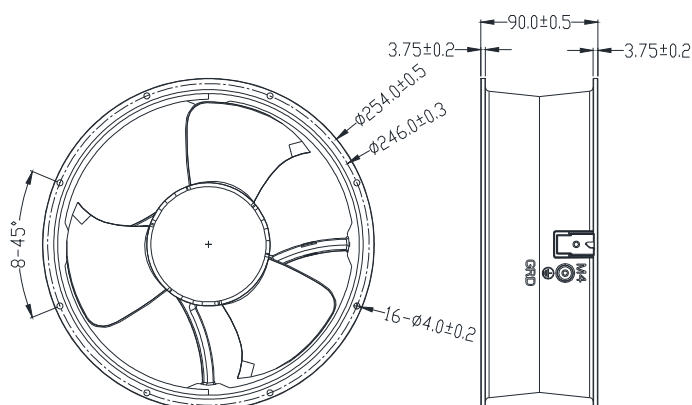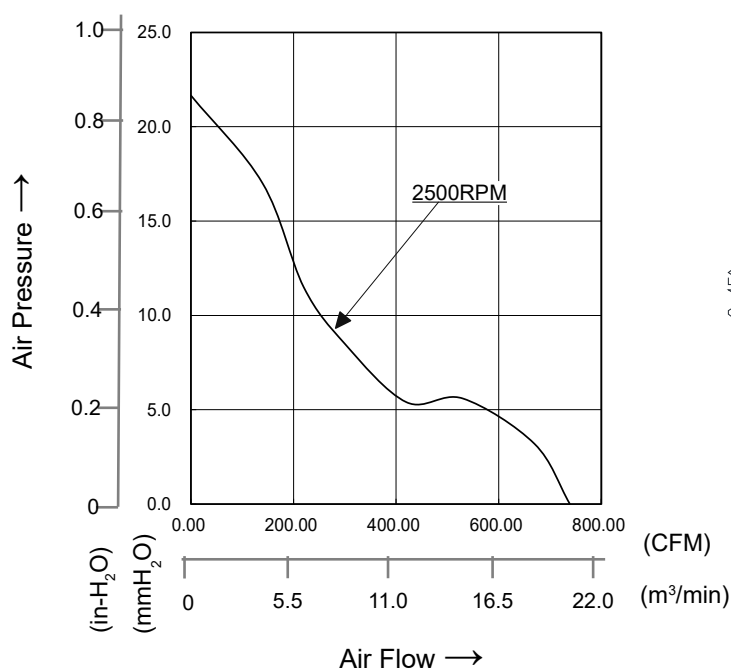

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





280x280x90mm

- **FRAME : ALUMINUM; IMPELLER : PBT (94V-0)**
- **OPERATING TEMP.: -10°C~70°C**
- **STORAGE TEMP.: -40°C~75°C**
- **CUSTOM WIRE AND CONNECTORS AVAILABLE**
- **WEIGHT :3000g**
- **SAFETY : CE**



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE2809011HB01	B	110	50/60	98.0	2500	32.219	1138.5	20.58	0.810	67.8
JSE2809022HB01	B	220	50/60	98.0	2500	32.219	1138.5	20.58	0.810	67.8

*Bearing system B:Two Ball Bearing

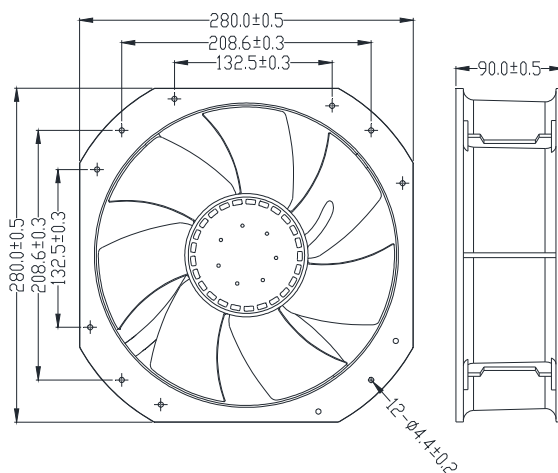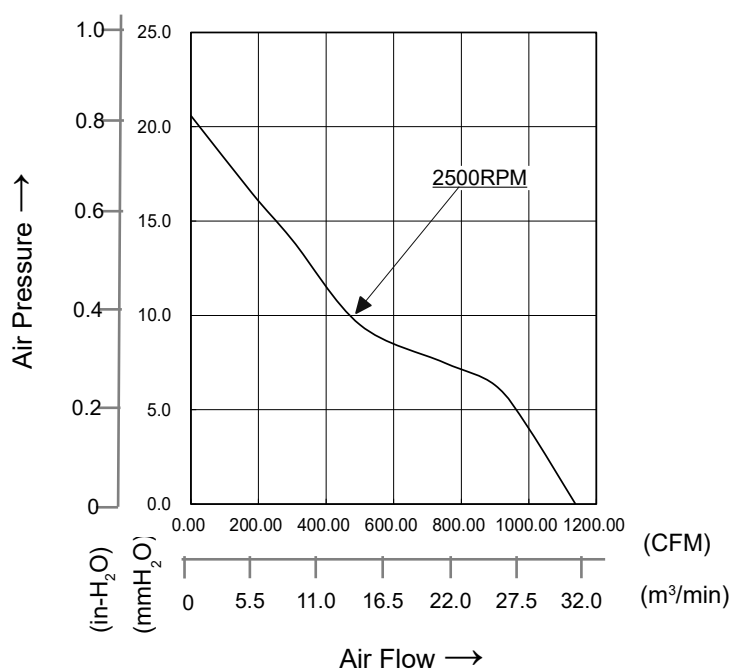

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.