

## EC FAN





**92x92x25mm**

- FRAME : PBT (94V-0); IMPELLER : PBT (94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- CUSTOM WIRE AND CONNECTORS AVAILABLE
- WEIGHT : 102g
- SAFETY : CE



| JARO           | Bearing System | Rated Voltage VAC | Frequency (Hz) | Rated Power W | Rated Speed (RPM) | Maximum             |      | Maximum             |                     | Sound |
|----------------|----------------|-------------------|----------------|---------------|-------------------|---------------------|------|---------------------|---------------------|-------|
|                |                |                   |                |               |                   | Air Flow            |      | Static Pressure     |                     | Level |
| Part Number    |                |                   |                |               |                   | m <sup>3</sup> /min | CFM  | mm-H <sub>2</sub> O | In-H <sub>2</sub> O | dBA   |
| JSE0922511M_02 | B / S          | 110               | 50/60          | 4.5           | 2600              | 1.584               | 56.0 | 4.05                | 0.159               | 35.0  |
| JSE0922522M_02 | B / S          | 220               | 50/60          | 4.5           | 2600              | 1.584               | 56.0 | 4.05                | 0.159               | 35.0  |

\*Bearing system B:Two Ball Bearing S:Sleeve Bearing

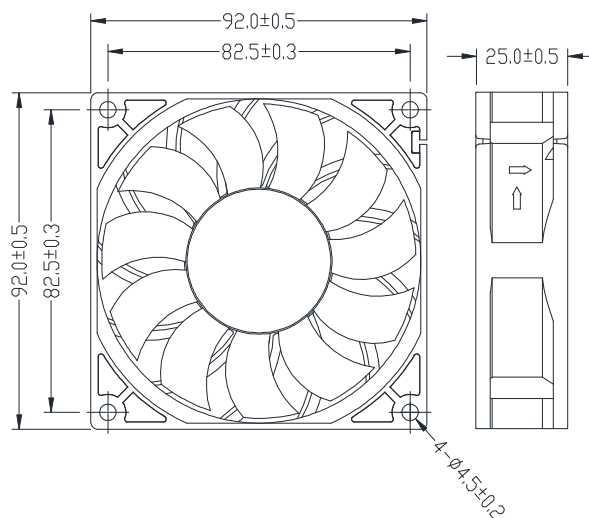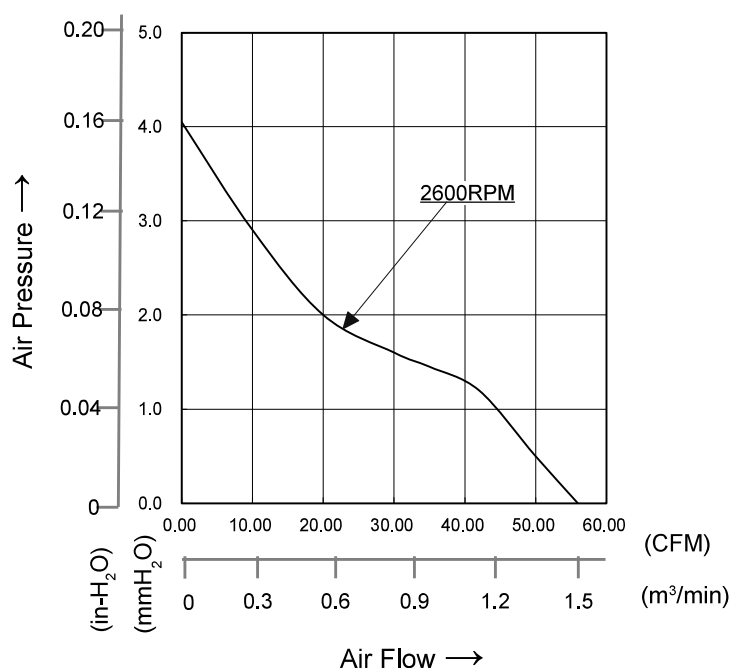

\*All models can be customized. Please contact your JARO representative for further information.

\*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.