

EC FAN





120x120x38mm

- FRAME : PBT (94V-0); IMPELLER : PBT (94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- CUSTOM WIRE AND CONNECTORS AVAILABLE
- WEIGHT :301.5g
- SAFETY : CE



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE1203811H_01	B / S	110	50/60	15.0	3500	3.787	133.82	13.10	0.515	52.4
JSE1203822H_01	B / S	220	50/60	15.0	3500	3.787	133.82	13.10	0.515	52.4

*Bearing system B:Two Ball Bearing S:Sleeve Bearing

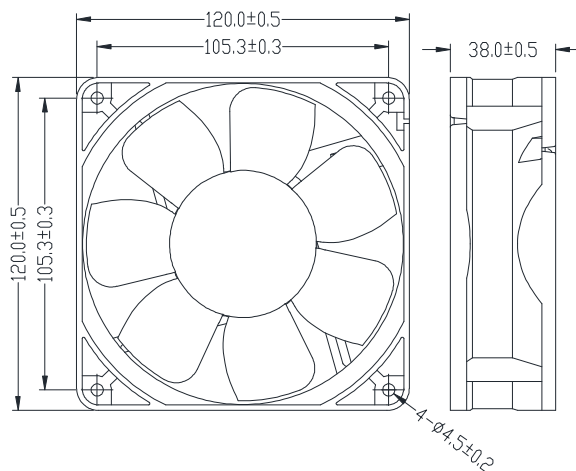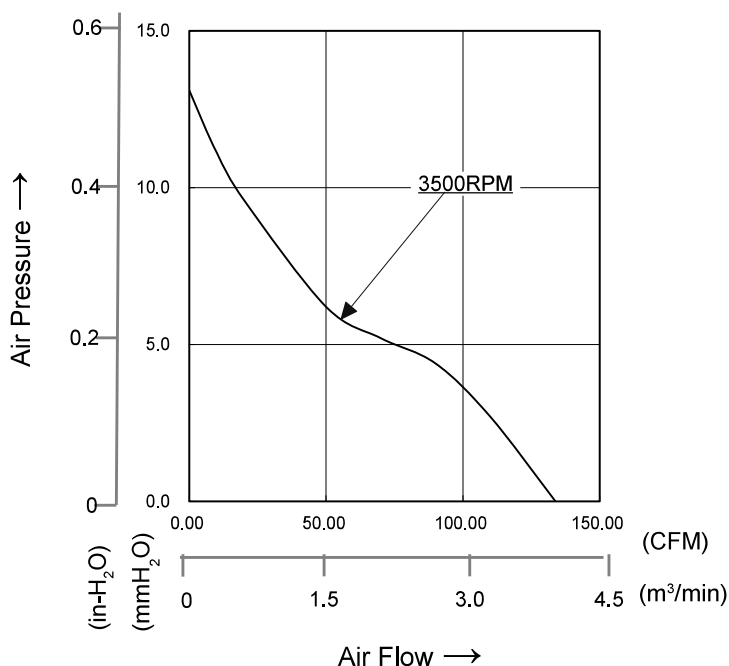

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.

EC FAN





120x120x38mm

- FRAME : PBT (94V-0); IMPELLER : PBT (94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~75°C
- CUSTOM WIRE AND CONNECTORS AVAILABLE
- WEIGHT :294.5g
- SAFETY : CE



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE1203811H_03	B / S	110	50/60	30.0	4500	5.917	209.1	25.50	1.003	64.7
JSE1203822H_03	B / S	220	50/60	30.0	4500	5.917	209.1	25.50	1.003	64.7

*Bearing system B:Two Ball Bearing S:Sleeve Bearing

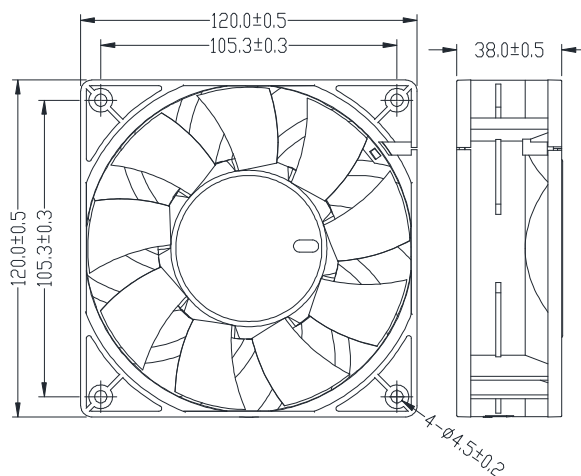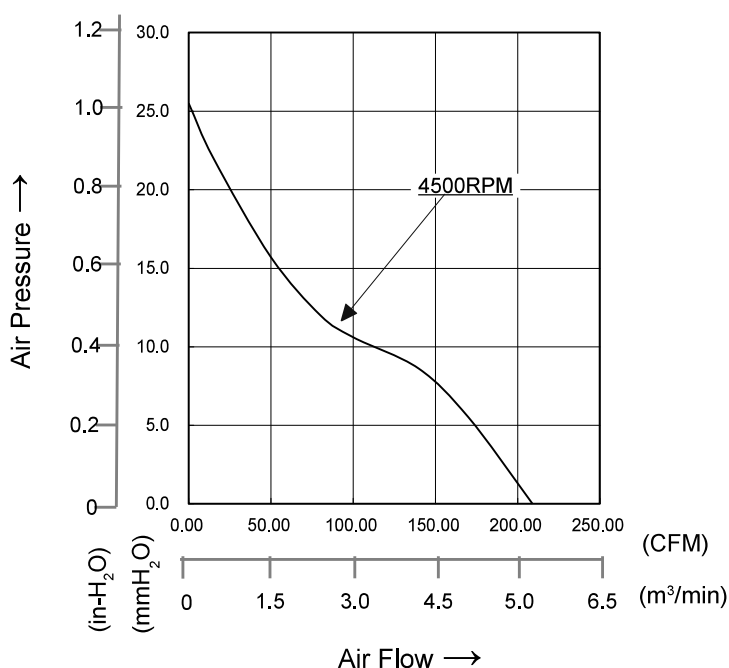

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.