

EC FAN





200x200x60mm

- **FRAME : ALUMINUM; IMPELLER : PBT (94V-0)**
- **OPERATING TEMP.: -10°C~70°C**
- **STORAGE TEMP.: -40°C~75°C**
- **CUSTOM WIRE AND CONNECTORS AVAILABLE**
- **WEIGHT :2800g**
- **SAFETY : CE**



JARO	Bearing System	Rated Voltage VAC	Frequency (Hz)	Rated Power W	Rated Speed (RPM)	Maximum		Maximum		Sound
						Air Flow		Static Pressure		Level
Part Number						m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JSE2006011LB01	B	110	50/60	40.0	2000	9.169	324.0	10.62	0.418	58.6
JSE2006022LB01	B	220	50/60	40.0	2000	9.169	324.0	10.62	0.418	58.6
JSE2006011MB01	B	110	50/60	50.0	2500	11.544	407.92	16.61	0.653	62.4
JSE2006022MB01	B	220	50/60	50.0	2500	11.544	407.92	16.61	0.653	62.4
JSE2006011HB01	B	110	50/60	70.0	3000	13.935	492.43	22.69	0.893	68.5
JSE2006022HB01	B	220	50/60	70.0	3000	13.935	492.43	22.69	0.893	68.5

*Bearing system B:Two Ball Bearing

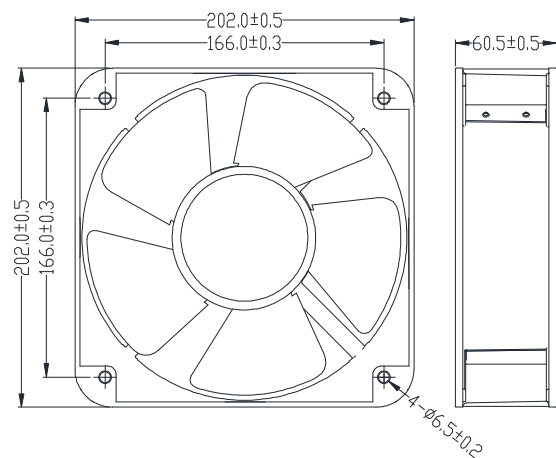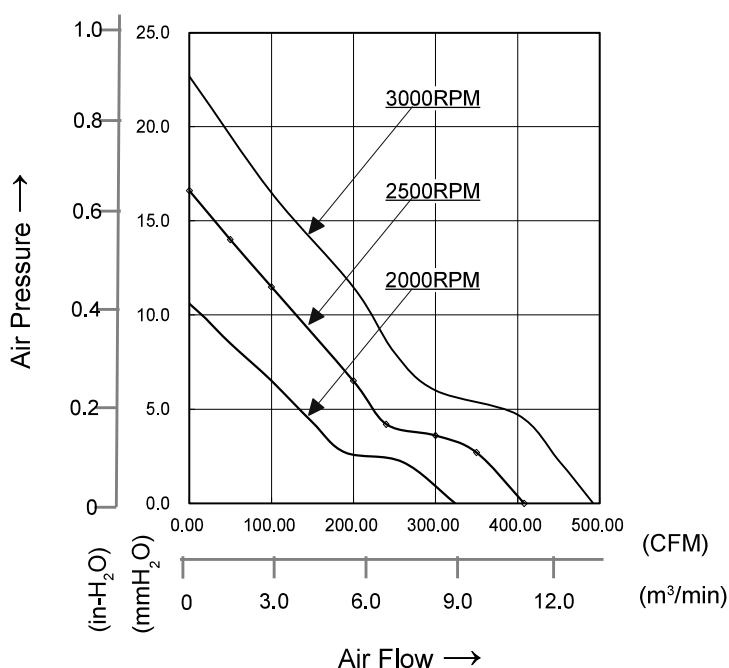

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.