



DC FANS

60x60x20mm




- MOTOR : DC single phase brushless motor
- FRAME : PBT (94V-0) ; IMPELLER : PBT(94V-0)
- OPERATING TEMP.: -10°C~70°C
- STORAGE TEMP.: -40°C~70°C
- WEIGHT : 50g



JARO Part Number	*Bearing System	Rated Voltage	Rated Current	Rated Speed	Maximum Air Flow		Maximum Static Pressure		Sound Level
	B / F	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA
JCD0602012JB1A0E	B	12	0.07	3200	0.38	13.5	3.05	0.12	24
JCD0602012LB1A0E	B	12	0.09	3600	0.42	14.8	3.81	0.15	26
JCD0602012MB1A0E	B	12	0.11	4000	0.46	16.4	4.83	0.19	29
JCD0602012HB1A0E	B	12	0.13	4400	0.51	18.1	5.84	0.23	31
JCD0602012UB1A0E	B	12	0.17	4800	0.56	19.6	6.86	0.27	33

*Bearing system B:two ball bearing

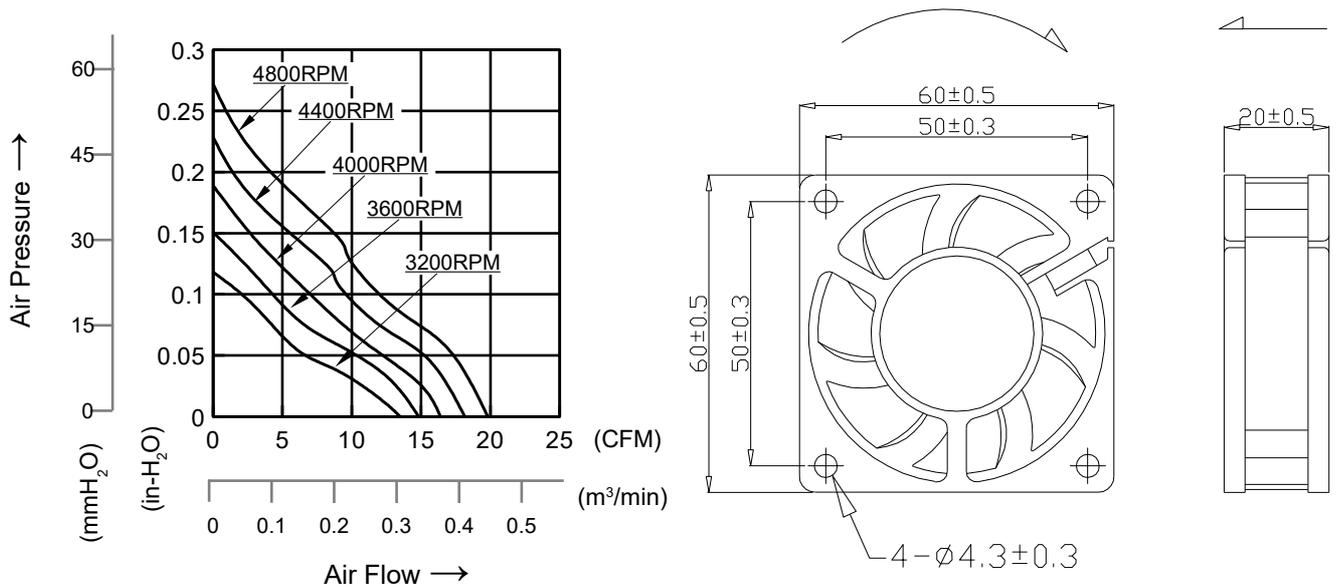

*All models can be customized. Please contact your JARO representative for further information.

*Specs are subject to change without notice. Please visit JARO website at <https://jarothermal.com> for update information.